Quick Setup Guide

MFC-8440
MFC-8840D

**Before you can use the MFC, you must set up the hardware and install the driver.
To help you get started in setting up the machine and installing the driver and software, please read this "Setup Guide" and follow the simple instructions.**

Step 1



Setting Up the Machine

Step 2

Installing the Driver & Software



Setup is Complete!

For the latest drivers and to find the best solution for your problem or question, access the Brother Solutions Center directly from the driver or go to **http://solutions.brother.com**
Keep this "Quick Setup Guide" , User's Guide and supplied CD-ROM in a convenient place for quick and easy reference at all times.

Carton Components

MFC

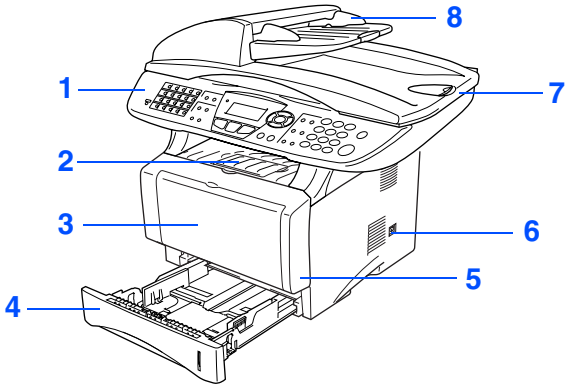

1. Control Panel
2. Face-down Output Tray Support Flap with Extension
3. (For MFC-8440) Manual Feed Tray (For MFC-8840D) Multi-purpose Tray (MP Tray)
4. Paper Tray
5. Front Cover
6. Power Switch
7. Document Cover
8. Automatic Document Feeder (ADF)



Quick Setup Guide

CD-ROMs
For Windows®
For Macintosh®



User's Guide



ADF Support



Drum Unit Assembly
(including Toner Cartridge)

AC Power Cord



Telephone Line Cord

Carton components may differ from one country to another.
Save all packing materials and the carton.

- *The interface cable is not a standard accessory. Please purchase the appropriate interface cable for the interface you intend to use (Parallel or USB).*
- *For Parallel use a bi-directional shield interface cable that is IEEE 1284-compliant, and not longer than 6 feet (2 meters).*
- *For USB use a Hi-Speed USB 2.0 interface cable that is not longer than 6 feet (2 meters).*
- *Please make sure that you use a Hi-Speed USB 2.0 certified cable if your computer uses a Hi-Speed USB 2.0 interface.*
- *Even if your computer has a USB 1.1 interface, you can connect the MFC.*

Control Panel

MFC-8440 and MFC-8840D have similar control panel keys.

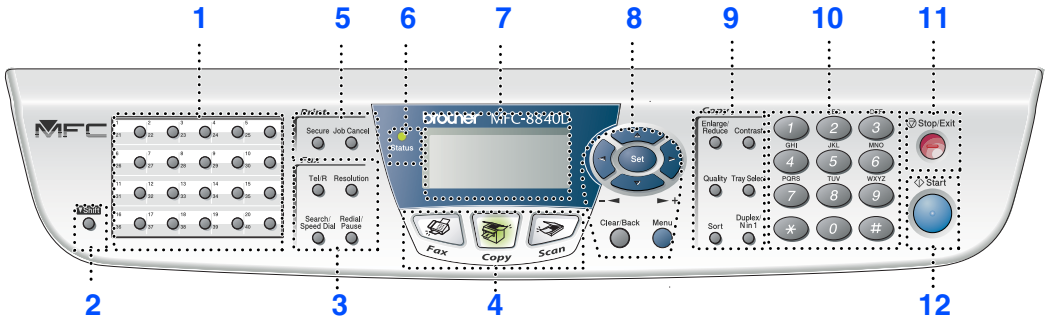

1. One Touch keys	**5**. Print keys	**9**. Copy keys (Temporary Settings)
2. Shift	**6**. Status LED (Light-Emitting Diode)	**10**. Dial Pad
3. Fax and telephone keys	**7**. 5-Line Liquid Crystal Display (LCD)	**11**. Stop/Exit
4. Mode keys	**8**. Navigation keys	**12**. Start

For the details of the control panel, see "Control panel overview" in Chapter 1 of the User's Guide.

Warning

When you move the MFC, grasp the side handholds that are under the scanner. Do NOT carry the MFC by holding it at the bottom.

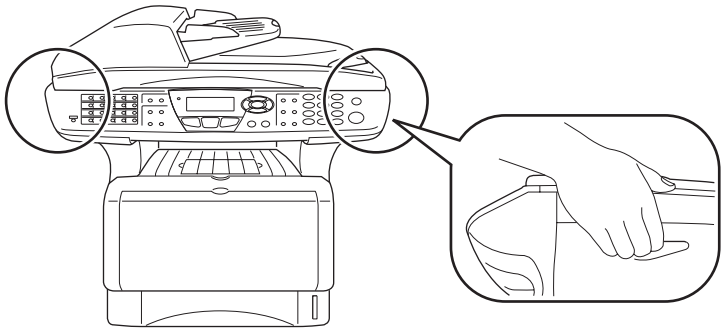

Warning		**Hint**	**User's Guide**
Indicates warnings that must be observed to prevent possible personal injury.	Indicates cautions that must be observed to use the MFC properly or to prevent damage to the MFC.	Indicates notes and useful tips to remember when using the MFC.	Indicates reference to the User's Guide.

Table of Contents

Step 1 Setting Up the Machine

1. Install the Automatic Document Feed (ADF) Support 2
2. Install the Drum Unit Assembly 2
3. Load Paper in the Paper Tray 3
4. Release the Scanner Lock 4
5. Install Power Cord and Phone Line 5
6. Selecting a Receive Mode 6
7. Setting the Date and Time 7
8. Setting Your Station ID 8

Step 2 Installing the Driver & Software

Windows®

Supplied CD-ROM (MFL-Pro Suite) 9

For USB Interface Cable Users
(For Windows® 98/98SE/Me/2000 Professional/XP) 11
- For Windows® 98/98SE/Me Users Only 14
- For Windows® 2000 Professional Users Only 16
- For Windows® XP Users Only 20

For Parallel Interface Cable Users
(For Windows® 98/98SE/Me/2000 Professional/XP) 23
- For Windows® 98/98SE/Me Users Only 26
- For Windows® 2000 Professional Users Only 27
- For Windows® XP Users Only 31

For Windows NT® Workstation Version 4.0 Users 34

For Network Interface Cable Users
(For Windows® 98/98SE/Me/NT/2000 Professional/XP) 37

Macintosh®

For USB Interface Cable Users 41
- For Mac OS® 8.6 to 9.2 41
- For Mac OS® X 10.1/10.2.1 or greater 43

For Network Interface Cable Users 45
- For Mac OS® 8.6 to 9.2 45
- For Mac OS® X 10.1/10.2.1 or greater 47

■ For Administrators

Network User's Guide Chapter Map (NC-9100h) 49

Installing the BRAdmin Professional Configuration Utility (Windows® Users Only) 50

Web BRAdmin (Windows® Users Only) 50

Setting your IP Address, Subnet Mask and Gateway using BRAdmin Professional (Windows® Users Only) 51

Options 52

Replacement Consumables 52

Step 1 Setting Up the Machine

1 Install the Automatic Document Feed (ADF) Support

Do NOT connect the interface cable. Connecting the interface cable is done when installing the driver.



1. Open the ADF cover.

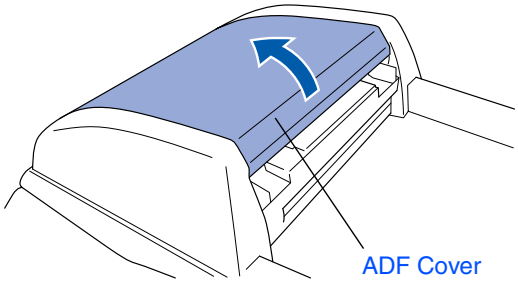

2. Insert the tabs of ADF support into the holes of the ADF one side at a time.

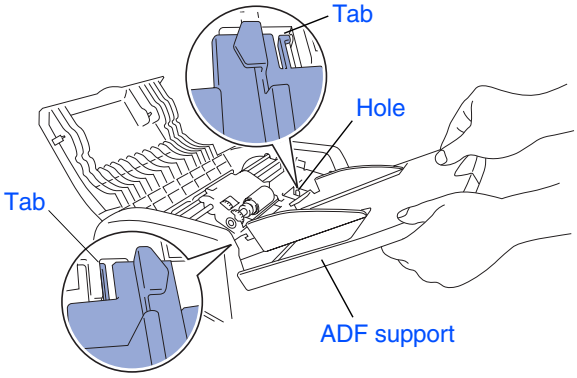

3. Push ADF Support down until it latches in place.

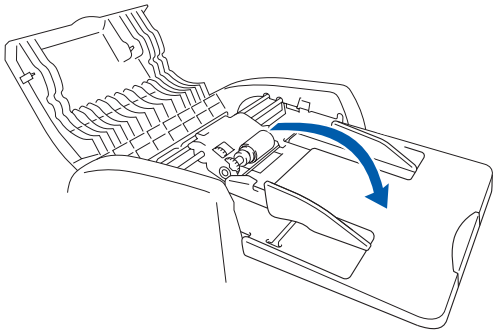

4. Close the ADF cover.

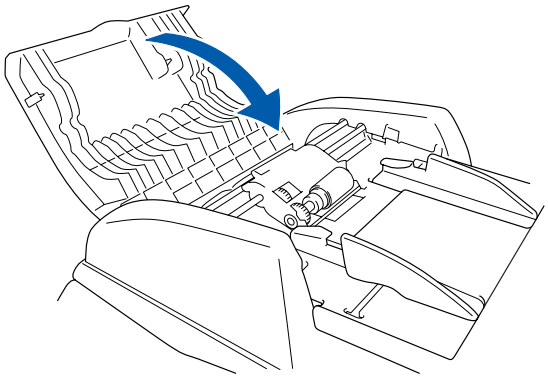

2 Install the Drum Unit Assembly

1. Open the front cover by pressing the front cover release button.

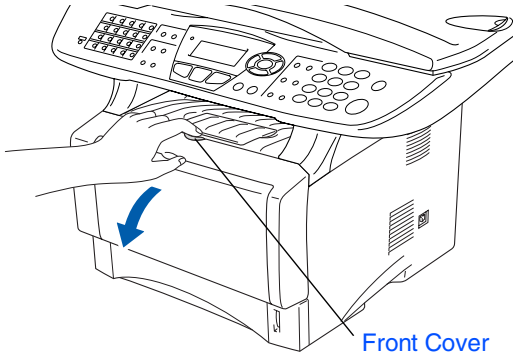

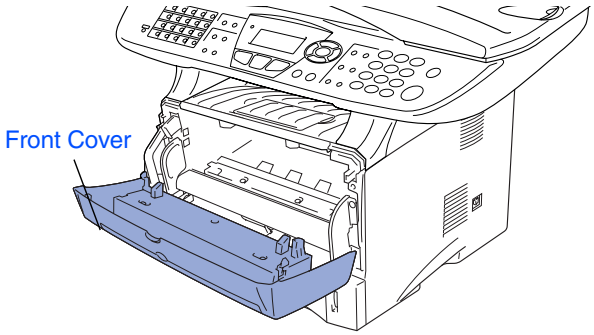

2. Unpack the drum unit assembly. Remove the protective part.

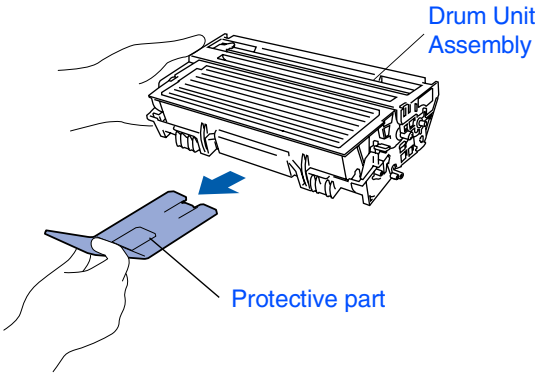

3 Rock it from side to side several times to distribute the toner evenly inside the assembly.

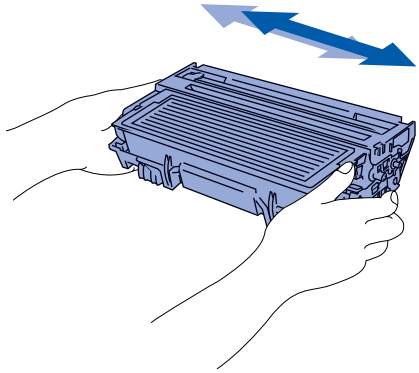

4 Push the drum unit assembly into the machine (until it snaps into place).

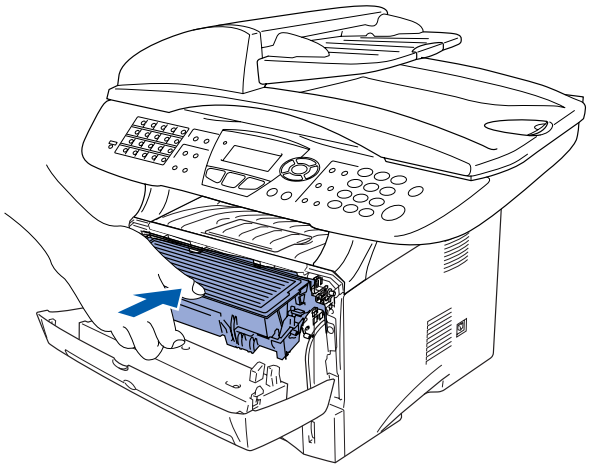

5 Close the front cover of the machine.

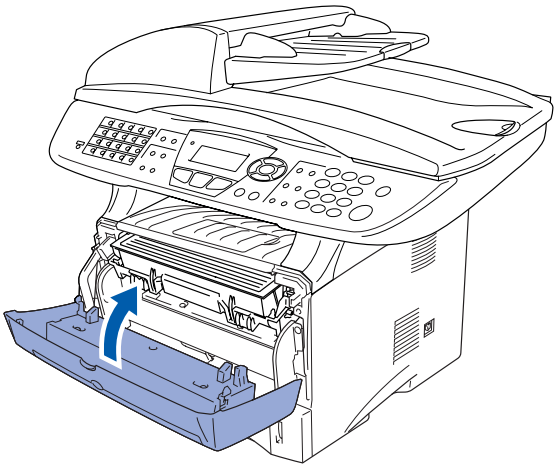

3 Load Paper in the Paper Tray

1 Pull the paper tray completely out of the machine.

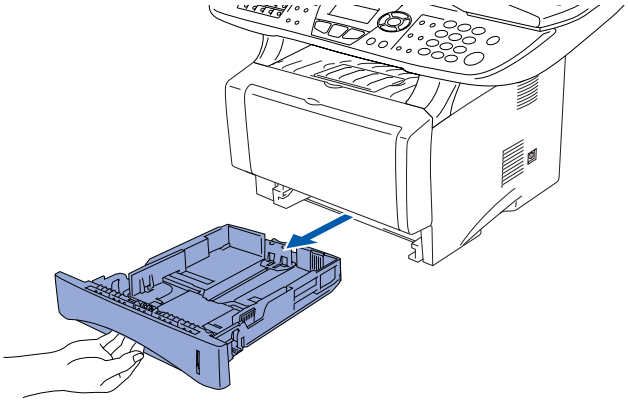

2 While pressing the paper guide release lever, slide the adjusters to fit the paper size. Check that the guides are firmly in the slots on the tray.

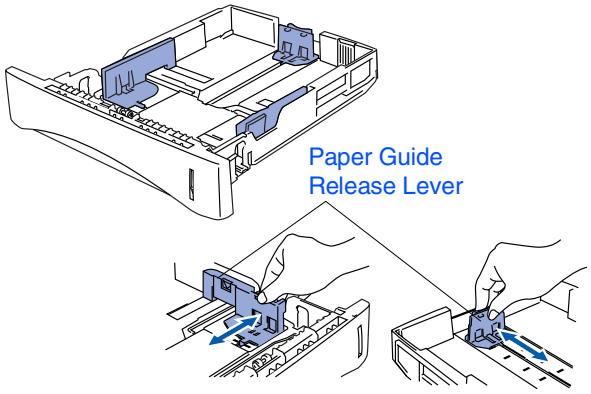

For Legal size paper, press the universal guide release button and pull out the rear of the paper tray.

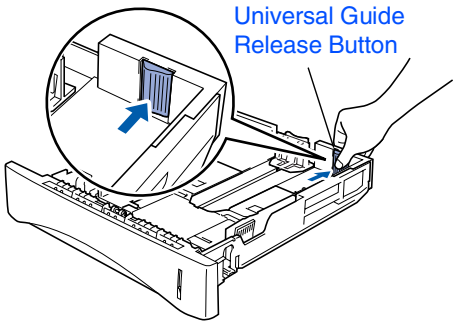

3 Fan the stack of paper well to avoid paper jams and misfeeds.

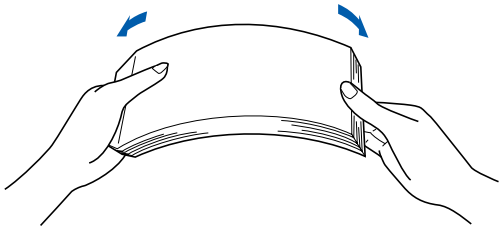

4 Put paper in the paper tray.
Check that the paper is flat in the tray and below the maximum paper mark.

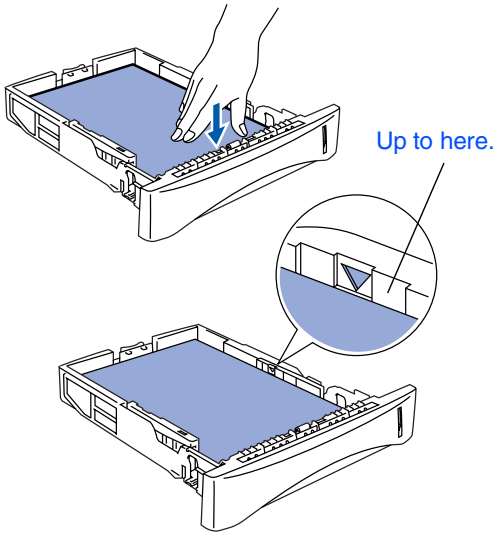

5 Put the paper tray firmly back in the machine and unfold the support flap before you use the machine.

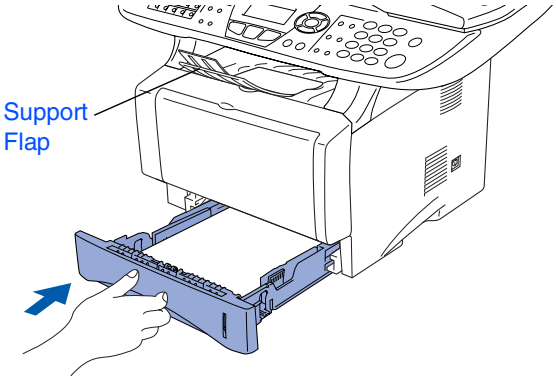

For details on supported paper specifications, see "Paper" in Chapter 2 (User's Guide).

4 Release the Scanner Lock

1 Push the lever up to unlock the scanner. (The gray scanner lock lever is located at the back left under side of the document cover.)

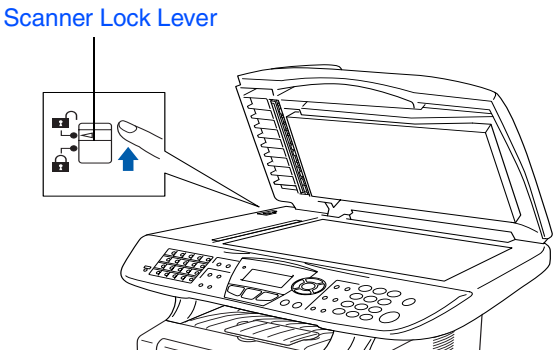

5 Install Power Cord and Phone Line

Do not connect the Parallel or USB cable yet.

1. Make sure that the power switch is off. Connect the AC power cord to the machine.

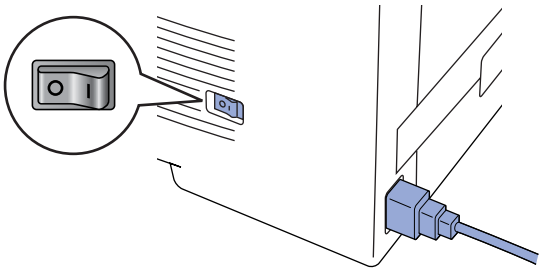

2. Plug the AC power cord into an AC outlet. Turn the power switch on.

If `Check Scan Lock` *appears on the LCD, immediately release the scanner lock and press* ***Stop/Exit****.*

3. Connect one end of the telephone line cord to the socket on the MFC marked **LINE** and the other end to a modular wall socket.

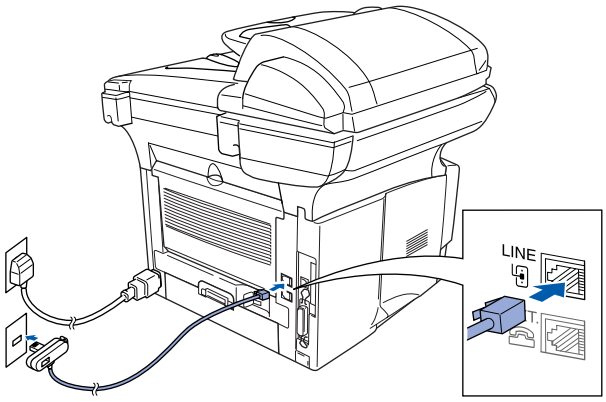

Warning

- *The MFC must be fitted with an earthed plug.*
- *Since the MFC is grounded through the power outlet, you can protect yourself from potentially hazardous electrical conditions on the telephone network by keeping the power to your MFC on when you connect it to a telephone line. Similarly, you can protect yourself when you want to move your MFC by disconnecting the telephone line first and then the power cord.*

If you are sharing one phone line with an external telephone, connect it as shown below.

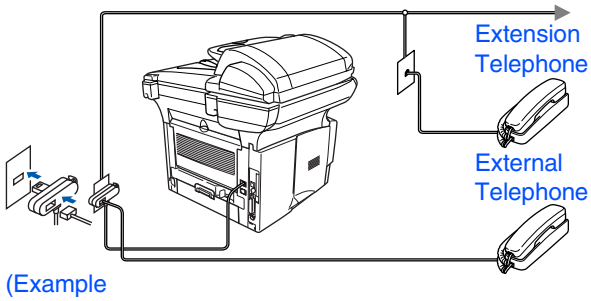

(Example for the U.K.)

If you are sharing one phone line with an external telephone answering device, connect it as shown below.

Please set the receive mode to External TAD.
For more details, see "Connecting the MFC" in Chapter 1 of the User's Guide.

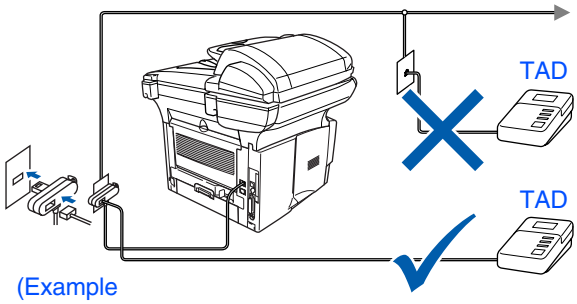

(Example for the U.K.)

Step 1 Setting Up the Machine

MFC-8440 and MFC-8840D have similar control panel keys.

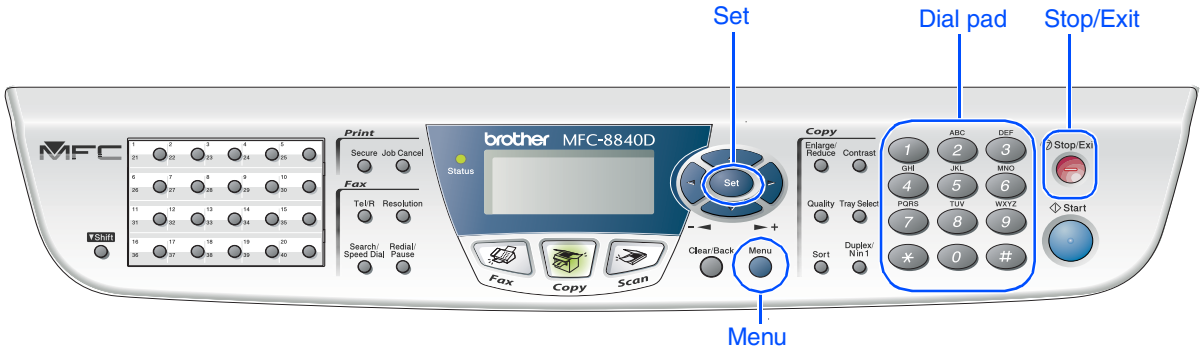

6 Selecting a Receive Mode

Choose the **Receive** mode which best suits your needs.

1. Press the **Menu** key.
2. Press 0 key.
3. Press 1 key.
4. Press ▲ or ▼ to select the mode.
5. Press the **Set** key.
6. Press the **Stop/Exit** key.

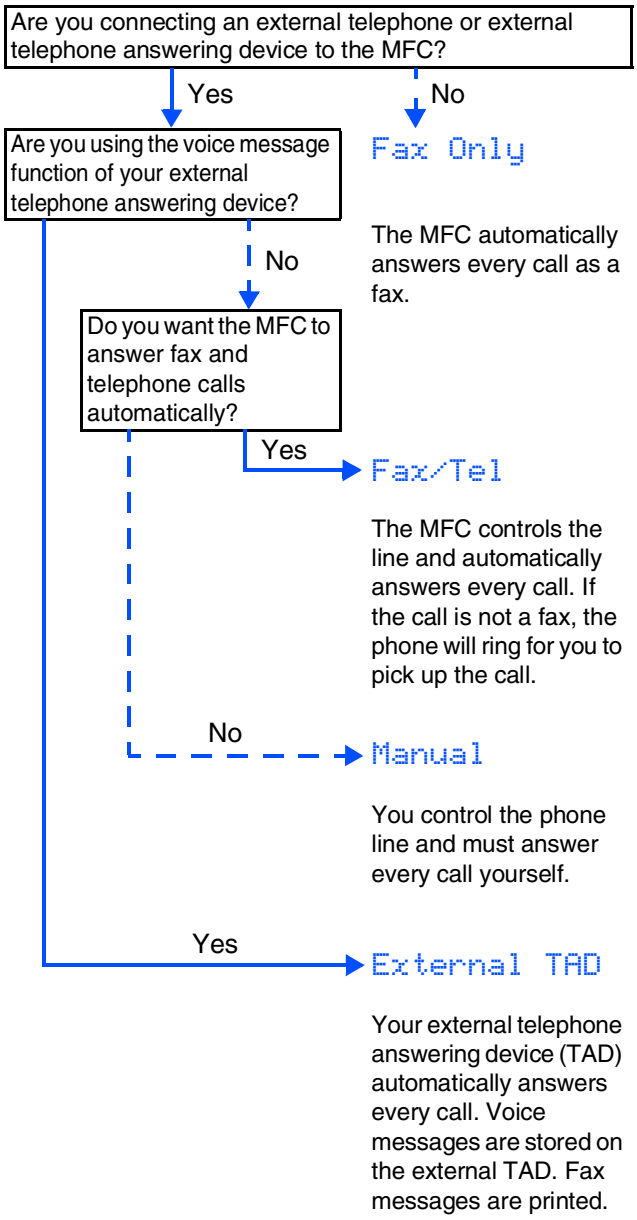
Are you connecting an external telephone or external telephone answering device to the MFC?
Yes
No
Are you using the voice message function of your external telephone answering device?
Fax Only
The MFC automatically answers every call as a fax.
No
Do you want the MFC to answer fax and telephone calls automatically?
Yes
Fax/Tel
The MFC controls the line and automatically answers every call. If the call is not a fax, the phone will ring for you to pick up the call.
No
Manual
You control the phone line and must answer every call yourself.
Yes
External TAD
Your external telephone answering device (TAD) automatically answers every call. Voice messages are stored on the external TAD. Fax messages are printed.

For more details, see "Setup Receive" in Chapter 5 of the User's Guide.

7 Setting the Date and Time

The MFC displays the date and time, and prints it on every fax you send.

1. Press the **Menu** key.
2. Press the 0 key.
3. Press the 2 key.
4. Enter the last two digits of the year on the dial pad, and then press the **Set** key.

```
02.Date/Time
  Year:2003
Enter & Set Key
```

(e.g. Enter **0**, **3** for 2003.)

5. Enter the two digits for the month on the dial pad, and then press the **Set** key.

```
02.Date/Time
  XX/XX/2003
  Month:03
Enter & Set Key
```

(e.g. Enter **0**, **3** for March.)

6. Enter the two digits for the day on the dial pad, and then press the **Set** key.

```
02.Date/Time
  XX/03/2003
  Day:01
Enter & Set Key
```

(e.g. Enter **0**, **1**.)

7. Enter the time in 24-hour format on the dial pad, and then press the **Set** key.

```
02.Date/Time
  01/03/2003
  Time:15:25
Enter & Set Key
```

(e.g. Enter **1**, **5**, **2**, **5** for 3:25 P.M.)

8. Press the **Stop/Exit** key.

*If you want to repeat from step1, press the **Stop/Exit** key.*

Step 1 Setting Up the Machine

MFC-8440 and MFC-8840D have similar control panel keys.

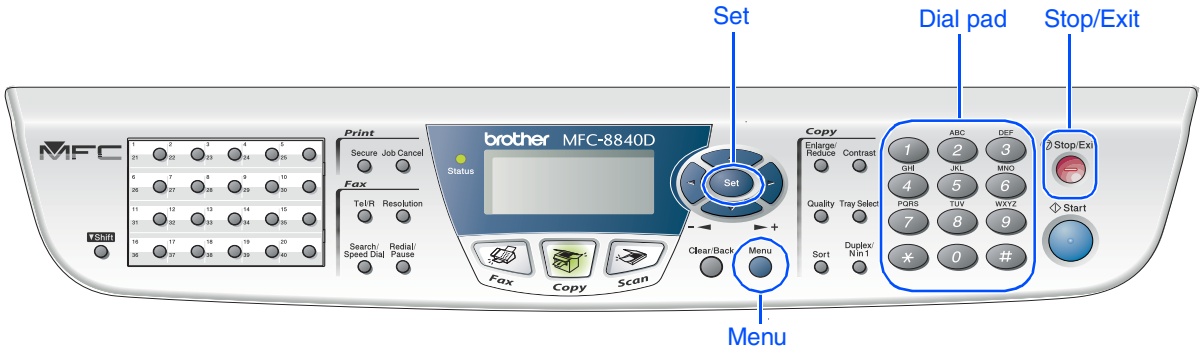

8 Setting Your Station ID

You should store your name and fax number to be printed on all fax pages that you send.

1. Press the **Menu** key.
2. Press the 0 key.
3. Press the 3 key.
4. Enter your fax number (up to 20 digits) on the dial pad, and then press the **Set** key.

```
03.Station ID
  Fax:_
Enter & Set Key
```

5. Enter your telephone number (up to 20 digits) on the dial pad, and then press the **Set** key.
(If your telephone number and fax number are the same, enter the same number again.)

```
03.Station ID
  Fax:+44XXXXXXXX
  Tel:_
Enter & Set Key
```

*Press * to enter "+" (plus) character.*

6. Use the dial pad to enter your name (up to 20 characters), and then press the **Set** key.

```
03.Station ID
  Fax:+44XXXXXXXX
  Tel:+44XXXXXXXX
  Name:_
Enter & Set Key
```

- *Refer to the following chart for entering your name.*
- *If you need to enter a character that is on the same key as the previous character, press ▶ to move the cursor to the right.*

Press key	One time	Two times	Three times	Four times
2	A	B	C	2
3	D	E	F	3
4	G	H	I	4
5	J	K	L	5
6	M	N	O	6
7	P	Q	R	S
8	T	U	V	8
9	W	X	Y	Z

For more details, see "Setting the Station ID" in Chapter 4 of the User's Guide.

7. Press the **Stop/Exit** key.

*If you want to repeat from step1, press the **Stop/Exit** key.*

Go to Next page to install the driver

Supplied CD-ROM (MFL-Pro Suite)

You can find a variety of information on the CD-ROM.

Windows®

Install Software
You can install printer, PC-FAX Send/Receive, scanner drivers and the various utility items, including PaperPort® and TextBridge® OCR.

On-Line Registration
You will be pointed to the Brother Product Registration Web Page for quick registration of your MFC (Internet access required).

Documentation
View the User's Guide and other documentation in PDF format. (Viewer included)

Brother Solutions Center
You can access the Brother Solutions Center which is a Web site offering information about your Brother product including FAQs, User's Guides, Driver updates and Tips for using your machine.

Help
Helpful hints.

Macintosh®

Start Here
You can install the printer driver, scanner driver, PC-FAX Send and Presto!® PageManager® for Mac OS® 8.6 - 9.2

Documentation
View the User's Guide and other documentations in PDF format.

Start Here OSX
You can install the printer driver, scanner driver, PC-Fax Send, remote setup program and Presto! PageManager® for Mac OS® 10.1/10.2.1 or greater (Scanning is not supported in Mac OS® 10.1).

Brother Solutions Center
You can access the Brother Solutions Center which is a Web site offering information about your Brother product including FAQs, User's Guides, Driver updates and Tips for using your machine.

ReadMe!
You can get important information and troubleshooting tips.

On-Line Registration
You will be pointed to the Brother Product Registration Web Page for quick registration of your MFC (Internet access required).

Step 2 Installing the Driver & Software

Follow the instructions on this page for your operating system and interface cable.

Windows®

USB Interface Cable Users ..... Go to page 11
(For Windows® 98/98SE/Me/2000 Professional/XP)

Parallel Interface Cable Users ..... Go to page 23
(For Windows® 98/98SE/Me/2000 Professional/XP)

Windows NT® Workstation Version 4.0 Users... Go to page 34
(For Parallel Interface Cable Users)

Network Interface Cable Users ..... Go to page 37
(For Windows® 98/98SE/Me/NT/2000 Professional/XP)

Macintosh®

USB Interface Cable Users
- **For Mac OS® 8.6 to 9.2 ..... Go to page 41**
- **For Mac OS® X 10.1/10.2.1 or greater ..... Go to page 43**

Network Interface Cable Users
- **For Mac OS® 8.6 to 9.2 ..... Go to page 45**
- **For Mac OS® X 10.1/10.2.1 or greater ..... Go to page 47**

For Administrators ..... Go to page 49

Step 2 Installing the Driver & Software

For USB Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 2 - 8.

1. Switch off and unplug the MFC from the AC outlet and disconnect it from your computer, if you already connected an interface cable.

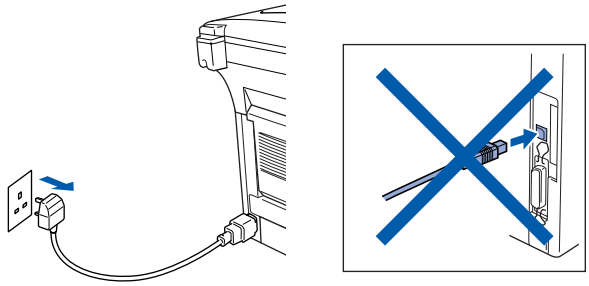

2. Turn on your computer.
(For Windows® 2000 Professional/XP, you must be logged on as the administrator.)

3. Insert the supplied CD-ROM for Windows® into your CD-ROM drive. If the model name screen appears, select your machine. If the language screen appears, select your language.

4. The CD-ROM main menu will appear. Click **Install Software**.

*If this window does not appear, use Windows® Explore to run the **setup.exe** program from the root directory of the Brother CD-ROM.*

5. Click **MFL-Pro Suite** in Main Application.

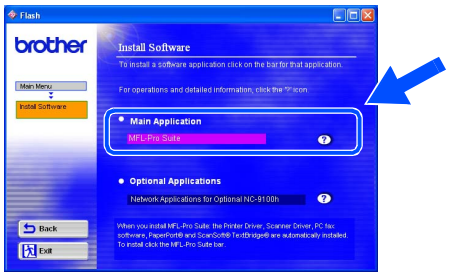

MFL-Pro Suite includes Printer Driver, Scanner Driver, ScanSoft® PaperPort®, ScanSoft® TextBridge®, PC-FAX software, Remote Setup and True Type fonts. PaperPort® is a document management application for viewing scanned documents. ScanSoft® TextBridge®, which is integrated into PaperPort®, is an OCR application that converts an image into text and inserts it into your default word processor.

6. Click **Install**.

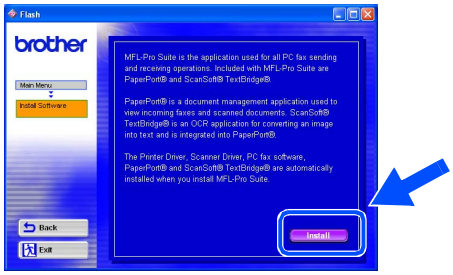

*If you see the following screen, click **OK** to install the Windows® updates. After the updates are installed your PC may restart. Note: If it does the installation will automatically continue.*

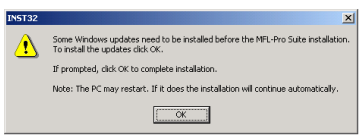
INST32
Some Windows updates need to be installed before the MFL-Pro Suite installation. To install the updates click OK.
If prompted, click OK to complete installation.
Note: The PC may restart. If it does the installation will continue automatically.
OK

*If the installation does not continue automatically, please open the installer menu again by double-clicking the **setup.exe** program from the root directory of the Brother CD-ROM, and continue from Step 4.*

7 When the PaperPort® 8.0 SE Setup window is displayed, click **Next**.

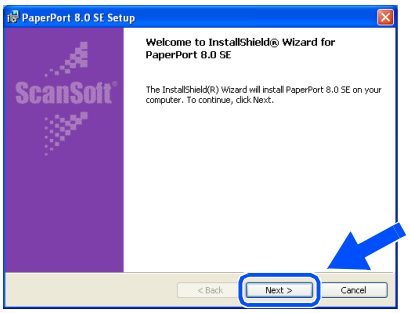
PaperPort 8.0 SE Setup
Welcome to InstallShield® Wizard for PaperPort 8.0 SE
The InstallShield(R) Wizard will install PaperPort 8.0 SE on your computer. To continue, click Next.
ScanSoft
< Back
Next >
Cancel

8 After reading and accepting the ScanSoft® License Agreement, enter your user information and click **Next**.

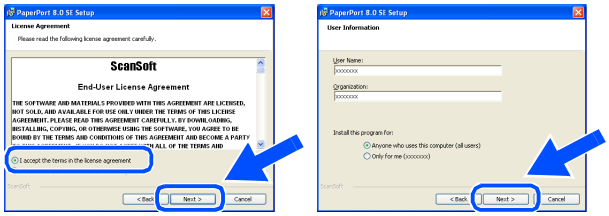

9 Select **Typical** and click **Next**.

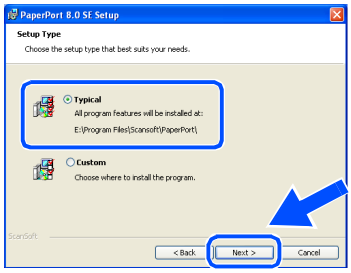

10 Click **Install** and PaperPort® will start installing on your computer.

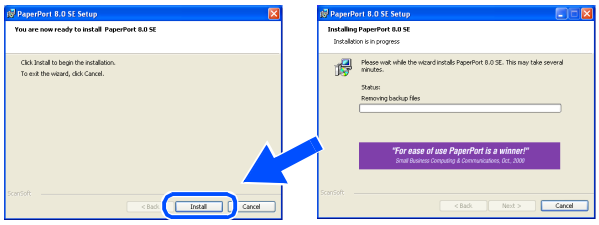
PaperPort 8.0 SE Setup
You are now ready to install PaperPort 8.0 SE
Click Install to begin the installation.
To exit the wizard, click Cancel.
Install
Cancel
PaperPort 8.0 SE Setup
Installing PaperPort 8.0 SE
Installation in progress
Status:
Removing backup files
"For ease of use PaperPort is a winner!"

11 When the ScanSoft® Registration screen is displayed, make your selection and follow the on-screen instructions.

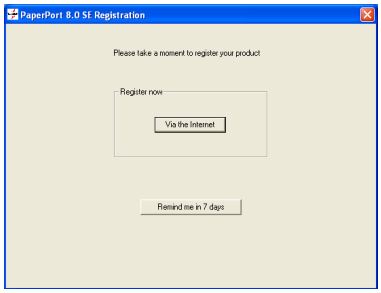
PaperPort 8.0 SE Registration
Please take a moment to register your product
Register now
Via the Internet
Remind me in 7 days

12 Click **Finish** to complete installation.

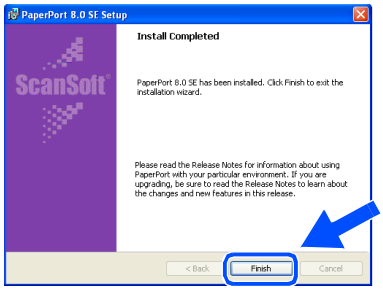
PaperPort 8.0 SE Setup
Install Completed
ScanSoft
PaperPort 8.0 SE has been installed. Click Finish to exit the installation wizard.
Please read the Release Notes for information about using PaperPort with your particular environment. If you are upgrading, be sure to read the Release Notes to learn about the changes and new features in this release.
< Back
Finish
Cancel

13 When the Brother MFL-Pro Suite Installation window appears, click **Next**.

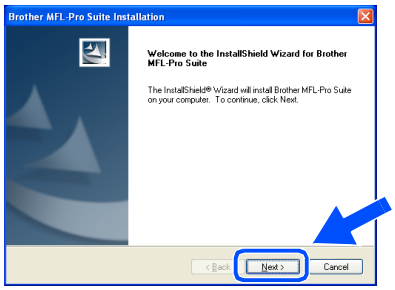
Brother MFL-Pro Suite Installation
Welcome to the InstallShield Wizard for Brother MFL-Pro Suite
The InstallShield® Wizard will install Brother MFL-Pro Suite on your computer. To continue, click Next.
< Back
Next >
Cancel

*If an error message appears at this point in the installation process, or if you have previously installed the MFL-Pro Suite, you will first have to uninstall it. From the **Start** menu, select **Programs**, **Brother**, **MFL-Pro Suite MFC-8840D**, **Uninstall**, and then follow the instructions on the screen.*

Continued ...

For USB Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

14 When the Brother Software License Agreement window appears, click **Yes**.

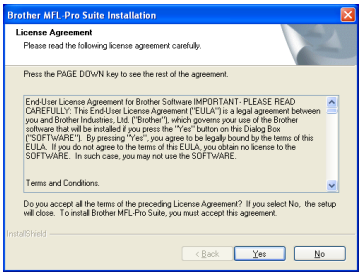
Brother MFL-Pro Suite Installation
License Agreement
Please read the following license agreement carefully.
Press the PAGE DOWN key to see the rest of the agreement.
Terms and Conditions.
Do you accept all the terms of the preceding License Agreement? If you select No, the setup will close. To install Brother MFL-Pro Suite, you must accept this agreement.
InstallShield
< Back
Yes
No

15 Select **Local Interface**, and then click **Next**.

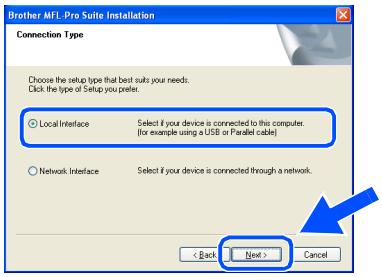
Brother MFL-Pro Suite Installation
Connection Type
Choose the setup type that best suits your needs.
Click the type of Setup you prefer.
Local Interface
Select if your device is connected to this computer.
(for example using a USB or Parallel cable)
Network Interface
Select if your device is connected through a network.
< Back
Next >
Cancel

16 Select **Standard**, and then click **Next**. The application files will be copied and installed to your computer.

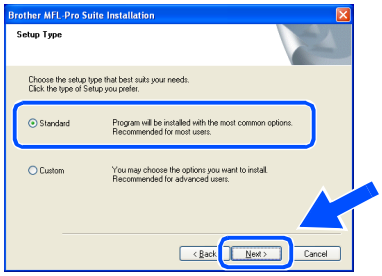
Brother MFL-Pro Suite Installation
Setup Type
Choose the setup type that best suits your needs.
Click the type of Setup you prefer.
Standard
Program will be installed with the most common options.
Recommended for most users.
Custom
You may choose the options you want to install.
Recommended for advanced users.
< Back
Next >
Cancel

*If you want to install the PS driver, select **Custom** and then follow the on-screen instructions. When the **Select Components** screen appears, check **PS Printer Driver**, and then continue following the on-screen instructions.*



Windows® 98/98SE/Me Users
→ Go to page 14
Windows® 2000 Professional Users
→ Go to page 16
Windows® XP Users
→ Go to page 20

For Windows® 98/98SE/Me Users Only

Make sure that you followed the instructions in 1 to 16 on pages 11 - 13.

17 When this screen appears, connect the USB interface cable to your PC, and then connect it to the MFC.
Turn on the MFC by plugging in the power cord. Turn the power switch on.


Brother MFL Pro Suite Installation
Connect Cable
If you use a Parallel cable:
1. Connect the MFC to your PC with the Parallel cable.
2. Turn the MFC on.
3. Click the Next button, and then click Finish to restart your PC.
4. After the PC restarts, Please wait until the installation is completed.
If you use a USB cable:
1. Connect the MFC to your PC with the USB cable, and then turn the MFC on.
2. Select BRUSB Port.
< Back
Next >
Cancel

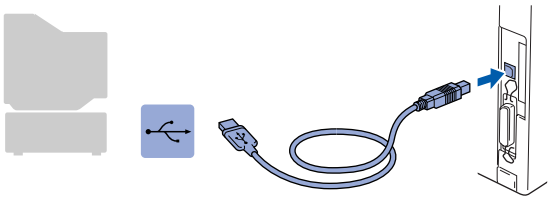

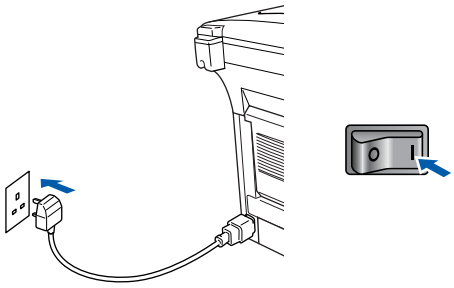

It will take a few seconds for the installation screen to appear.
The installation of the Brother drivers will automatically start. Follow the instructions on the screen.

18 Select **BRUSB: USB Printer Port**, and then click **Next**.

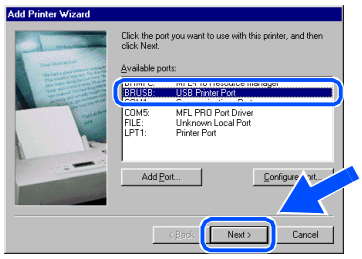
Add Printer Wizard
Click the port you want to use with this printer, and then click Next.
Available ports:
BRUSB: USB Printer Port
COM5: MFL PRO Port Driver
FILE: Unknown Local Port
LPT1: Printer Port
Add Port...
Configure Port...
< Back
Next >
Cancel

19 Accept the default Printer name by selecting **Yes**, and then click **Next**.


Add Printer Wizard
You can type a name for this printer, or you can use the name supplied below. When you have finished, click Next.
Printer name:
Brother MFC 8840D USB Printer
Do you want your Windows-based programs to use this default printer?
Yes
< Back
Next >
Cancel

20 Select **Yes (recommended)**, and then click **Finish**. A test page will be printed so you can check the print quality.


Add Printer Wizard
After your printer is installed, Windows can print a test page so you can confirm that the printer is set up properly.
Would you like to print a test page?
Yes (recommended)
No
< Back
Finish
Cancel

Continued ...

Step 2 Installing the Driver & Software

For USB Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

21 If the test page is printed correctly, click **Yes**. If you click **No**, follow the prompts on the screen to correct the problem.

Brother MFC-8840D USB Printer
Printer test page completed!
A test page is now being sent to the printer. Depending on the speed of your printer, it may take a minute or two before the page is printed.
The test page briefly demonstrates the printer's ability to print graphics and text, as well as providing technical information about the printer driver.
Did the test page print correctly?
Yes
No

*If the README.WRI file shown in Step 22 appears, close the README.WRI file and then click **Finish** after printing the test page.*

22 The README.WRI file will be displayed. Please read this file for troubleshooting information and then close the file to continue installation.

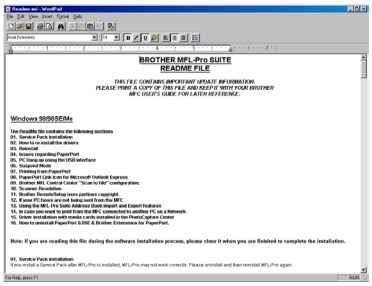

23 Check the **Run On-Line Registration** and then click **Next**.

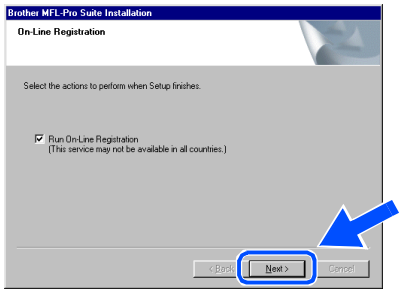
Brother MFL-Pro Suite Installation
On-Line Registration
Select the actions to perform when Setup finishes.
Run On-Line Registration
(This service may not be available in all countries.)
< Back
Next >
Cancel

24 Click **Finish** to restart your computer.

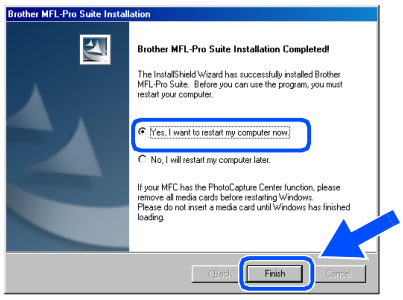
Brother MFL-Pro Suite Installation
Brother MFL-Pro Suite Installation Completed!
The InstallShield Wizard has successfully installed Brother MFL-Pro Suite. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
If your MFC has the PhotoCapture Center function, please remove all media cards before restarting Windows. Please do not insert a media card until Windows has finished loading.
< Back
Finish
Cancel

25 After the computer restarts, click **Yes** to have the Control Center load each time Windows® is started. The Control Center will appear as an icon in the task tray. If you click **No** the Scan keys on the MFC will be disabled.

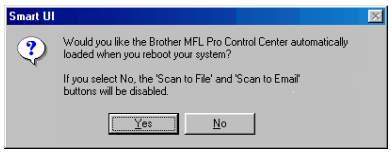
Smart UI
Would you like the Brother MFL Pro Control Center automatically loaded when you reboot your system?
If you select No, the 'Scan to File' and 'Scan to Email' buttons will be disabled.
Yes
No

- *If you checked the box in step 23, the screen for On-Line Registration will appear. Please complete your registration before proceeding to step 25.*
- *Even if you select **No**, you will be able to launch the Brother Control Center later to use the **Scan** key by double clicking the Smart UI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 14 in the Documentation (User's Guide) located on the CD-ROM.*

OK! **The Brother PC-FAX, Printer and Scanner drivers have been installed and the installation is now complete.**

For Windows® 2000 Professional Users Only

Make sure that you followed the instructions in 1 to 16 on pages 11 - 13.

17 When this screen appears, connect the USB interface cable to your PC, and then connect it to the MFC.
Turn on the MFC by plugging in the power cord. Turn the power switch on.

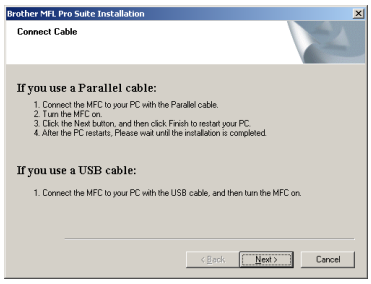
Brother MFL Pro Suite Installation
Connect Cable
If you use a Parallel cable:
1. Connect the MFC to your PC with the Parallel cable.
2. Turn the MFC on.
3. Click the Next button, and then click Finish to restart your PC.
4. After the PC restarts, Please wait until the installation is completed.
If you use a USB cable:
1. Connect the MFC to your PC with the USB cable, and then turn the MFC on.
Back
Next
Cancel

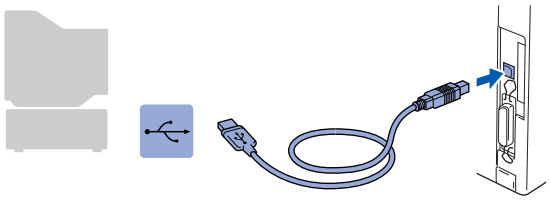

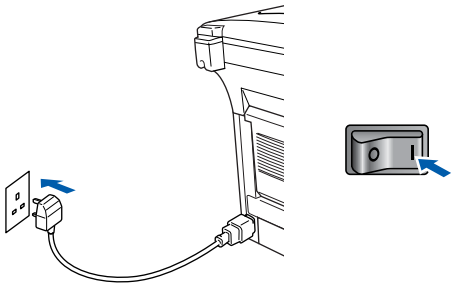

It will take a few seconds for the installation screen to appear.
The installation of the Brother drivers will automatically start. Follow the instructions on the screen.

18 If the **Digital Signature Not Found** dialog boxes appear, click **Yes** to install the driver.


Digital Signature Not Found
The Microsoft digital signature affirms that software has been tested with Windows and that the software has not been altered since it was tested.
The software you are about to install does not contain a Microsoft digital signature. Therefore, there is no guarantee that this software works correctly with Windows.
Brother MFC 8840D USB Scanner
Do you want to continue the
Yes
No
More Info


Digital Signature Not Found
The Microsoft digital signature affirms that software has been tested with Windows and that the software has not been altered since it was tested.
The software you are about to install does not contain a Microsoft digital signature. Therefore, there is no guarantee that this software works correctly with Windows.
Printers
Do you want to continue the
Yes
No
More Info

19 The README.WRI file will be displayed.
Please read this file for troubleshooting information and then close the file to continue installation.

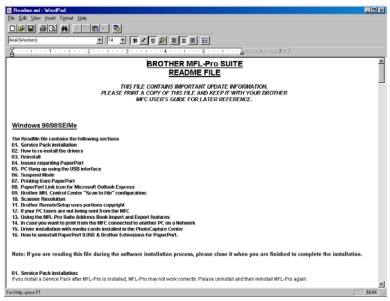

20 Check the **Run On-Line Registration** and then click **Next**.

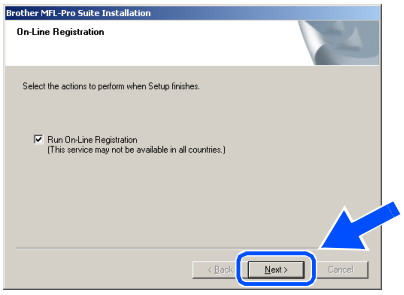

21 Click **Finish** to restart your computer.

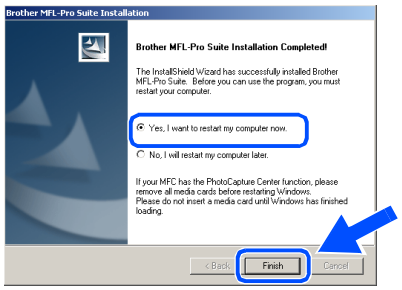
Brother MFL-Pro Suite Installation
Brother MFL-Pro Suite Installation Completed!
The InstallShield Wizard has successfully installed Brother MFL-Pro Suite. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
If your MFC has the PhotoCapture Center function, please remove all media cards before restarting Windows. Please do not insert a media card until Windows has finished loading.
Back
Finish
Cancel

Continued ...

For USB Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

22 After the computer restarts, click **Yes** to have the Control Center load each time Windows® is started. The Control Center will appear as an icon in the task tray.
If you click **No** the Scan keys on the MFC will be disabled.

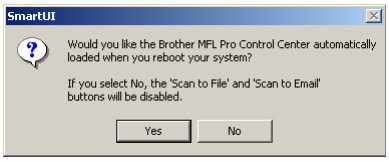
SmartUI
Would you like the Brother MFL Pro Control Center automatically loaded when you reboot your system?
If you select No, the 'Scan to File' and 'Scan to Email' buttons will be disabled.
Yes
No

- *If you checked the box in step 20, the screen for On-Line Registration will appear. Please complete your registration before proceeding to step 22.*
- *Even if you select **No**, later you will be able to launch the Brother Control Center to use the **Scan** key by double clicking the Smart UI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 14 in the Documentation (User's Guide) located on the CD-ROM.*

OK! **A Basic Universal printer driver was installed with the MFL-PRO Software Suite which is certified for use with Windows operating systems.**

Brother also offers a full featured printer driver (Native driver) that includes more features than the Basic Universal driver. However, this driver does not include a Windows certificate. To install the Brother Native driver proceed to step 23.

For details on what features are available see chapter 12 of the User's Guide.

Brother Native driver Installation

23 Click **Start** and select **Settings** and then **Printers**. Click on **Add a printer** and the Add Printer Wizard will start.
When this screen appears, click **Next**.

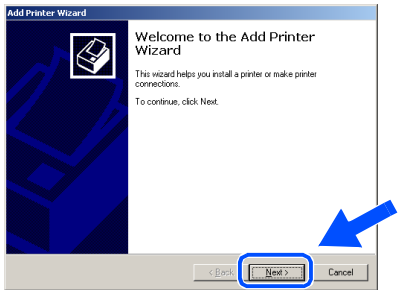
Add Printer Wizard
Welcome to the Add Printer Wizard
This wizard helps you install a printer or make printer connections.
To continue, click Next.
< Back
Next >
Cancel

24 Un-check the **Automatically detect and install my Plug and Play printer** selection and then click **Next**.

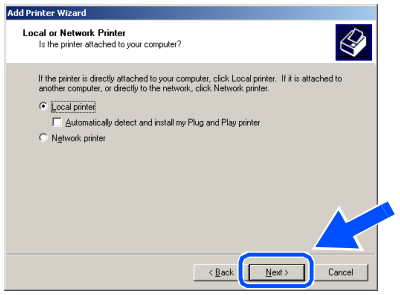
Add Printer Wizard
Local or Network Printer
Is the printer attached to your computer?
If the printer is directly attached to your computer, click Local printer. If it is attached to another computer, or directly to the network, click Network printer.
Local printer
Automatically detect and install my Plug and Play printer
Network printer
< Back
Next >
Cancel

25 Select **USBXXX** from the pull down window for the Printer Port Selection and then click **Next**.

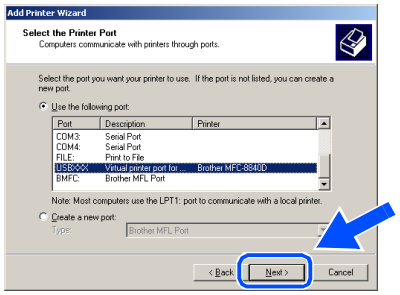

26 Click on **Have Disk**.

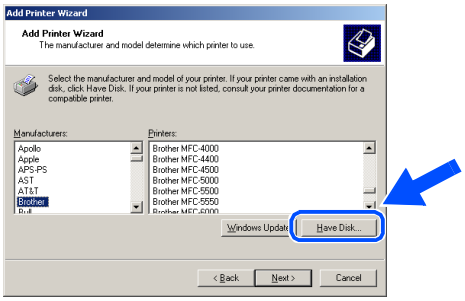

27 Browse the CD-ROM and highlight your language folder and click **Open**. Highlight the **W2K** folder and click **Open**. Highlight the **Addprt** folder and click **Open**.

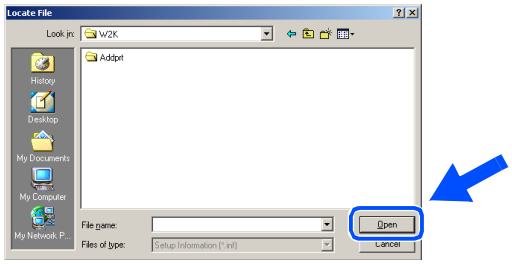

28 Click **Open**.

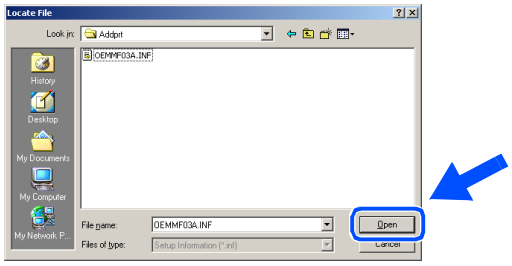

29 Make sure **X:\ENG\W2K\Addprt** is displayed in the window and click **OK** (X:\ is the drive letter of your CD-ROM).

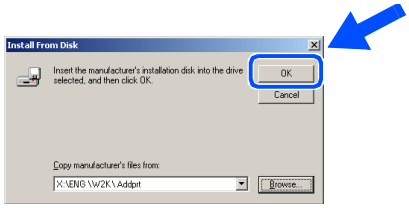

30 Highlight the model you are installing from the list of machines and click **Next**.

Please install USB printer.

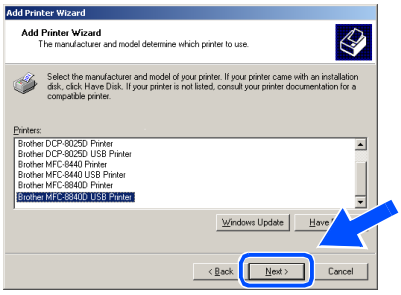
Add Printer Wizard
Add Printer Wizard
The manufacturer and model determine which printer to use.
Select the manufacturer and model of your printer. If your printer came with an installation disk, click Have Disk. If your printer is not listed, consult your printer documentation for a compatible printer.
Printers:
Brother DCP-8025D Printer
Brother DCP-8025D USB Printer
Brother MFC-8440 Printer
Brother MFC-8440 USB Printer
Brother MFC-8840D Printer
Brother MFC-8840D USB Printer
Windows Update
Have
< Back
Next >
Cancel

31 The model you are installing will be listed in the window. Select **Yes** or **No** if you want this driver to be your default printer.

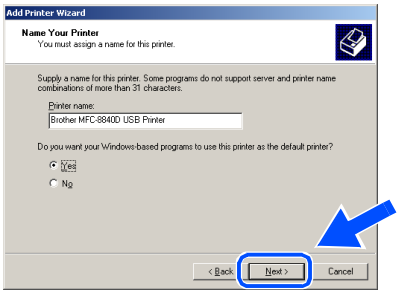
Add Printer Wizard
Name Your Printer
You must assign a name for this printer.
Supply a name for this printer. Some programs do not support server and printer name combinations of more than 31 characters.
Printer name:
Brother MFC-8840D USB Printer
Do you want your Windows-based programs to use this printer as the default printer?
Yes
No
< Back
Next >
Cancel

32 If this screen appears, select **Do not share this printer** and **Next**.

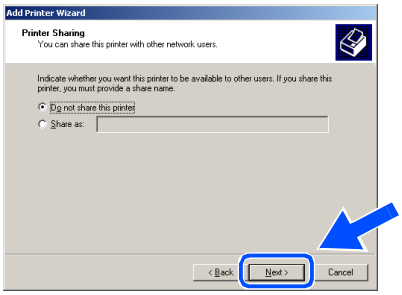
Add Printer Wizard
Printer Sharing
You can share this printer with other network users.
Indicate whether you want this printer to be available to other users. If you share this printer, you must provide a share name.
Do not share this printer
Share as:
< Back
Next >
Cancel

Continued ...

For USB Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

33 Select **Yes** and **Next** to print a test page.

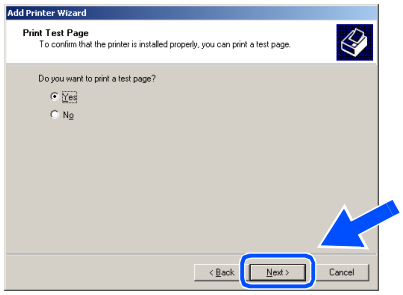
Add Printer Wizard
Print Test Page
To confirm that the printer is installed properly, you can print a test page.
Do you want to print a test page?
Yes
No
< Back
Next >
Cancel

34 When this screen appears, click **Finish**.

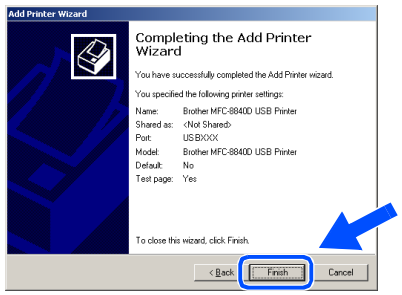

35 If the Digital Signature Not Found dialog box appears, click **Yes**.


Digital Signature Not Found
The Microsoft digital signature affirms that software has been tested with Windows and that the software has not been altered since it was tested.
The software you are about to install does not contain a Microsoft digital signature. Therefore, there is no guarantee that this software works correctly with Windows.
Printers
If you want to search for Microsoft digitally signed software, visit the Windows Update Web site
Do you want to continue the
Yes
No
More Info

36 If the test page printed, click **OK**.


Brother MFC-8840D Printer on IDCS144A
A test page is now being sent to the printer. Depending on the speed of your printer, it may take a minute or two before the page is printed.
The test page briefly demonstrates the printer's ability to print graphics and text, and it provides technical information about the printer driver.
If the test page printed, click OK.
If the test page did not print, click Troubleshoot.
OK
Troubleshoot...

There will be two Brother printer drivers listed in the Printers selection.
The driver with "Printer" after the model name (ex. Brother MFC-8840D Printer) is the Brother Native Driver.

OK! **The Brother Native Drivers have been installed and the installation is now complete.**

For Windows® XP Users Only

Make sure that you followed the instructions in 1 to 16 on pages 11 - 13.

17 When this screen appears, connect the USB interface cable to your PC, and then connect it to the MFC.
Turn on the MFC by plugging in the power cord. Turn the power switch on.


Brother MFL-Pro Suite Installation
Connect Cable
If you use a Parallel cable:
1. Connect the MFC to your PC with the Parallel cable.
2. Turn the MFC on.
3. Wait for the installation process to continue.
If you use a USB cable:
1. Connect the MFC to your PC with the USB cable, and then turn the MFC on.
2. Wait for the installation process to continue.
* Some windows will open and close during the installation process.
< Back
Next >
Cancel

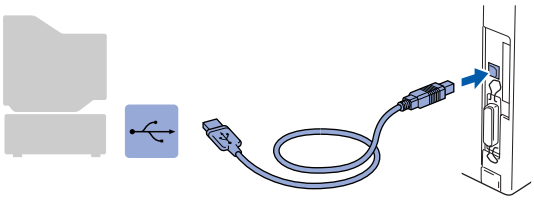

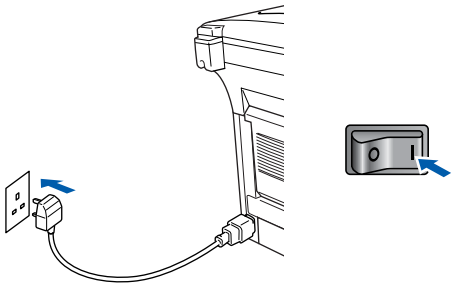

It will take a few seconds for the installation screen to appear.
The installation of the Brother drivers will automatically start. The screens appear one after another, please wait for a while.

18 The README.WRI file will be displayed. Please read this file for troubleshooting information and then close the file to continue installation.

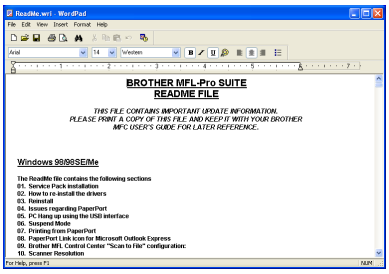
BROTHER MFL-Pro SUITE
README FILE
THIS FILE CONTAINS IMPORTANT UPDATE INFORMATION.
PLEASE PRINT A COPY OF THIS FILE AND KEEP IT WITH YOUR BROTHER MFC USER'S GUIDE FOR LATER REFERENCE.
Windows 98/98SE/Me

19 Check the **Run On-Line Registration** and then click **Next**.

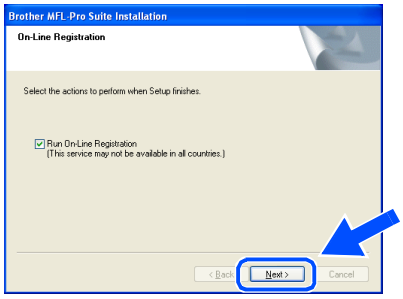
Brother MFL-Pro Suite Installation
On-Line Registration
Select the actions to perform when Setup finishes.
Run On-Line Registration
(This service may not be available in all countries.)
< Back
Next >
Cancel

20 Click **Finish** to restart your computer.

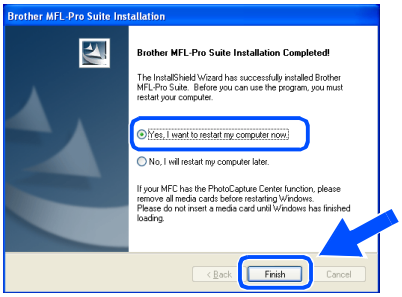
Brother MFL-Pro Suite Installation
Brother MFL-Pro Suite Installation Completed!
The InstallShield Wizard has successfully installed Brother MFL-Pro Suite. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
If your MFC has the PhotoCapture Center function, please remove all media cards before restarting Windows. Please do not insert a media card until Windows has finished loading.
< Back
Finish
Cancel

If you checked the box in step 19, the screen for On-Line Registration will appear. Please complete your registration before proceeding to step 20.

OK! **A Basic Universal printer driver was installed with the MFL-PRO Software Suite which is certified for use with Windows operating systems.**

Brother also offers a full featured printer driver (Native driver) that includes more features than the Basic Universal driver. However, this driver does not include a Windows certificate. To install the Brother Native driver proceed to step 21.

For details on what features are available see chapter 12 of the User's Guide.

Continued ...

For USB Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

Brother Native driver Installation

21 Click **Start** and select **Printers and Faxes**. Click on **Add a printer** and the Add Printer Wizard will start.
When this screen appears, click **Next**.

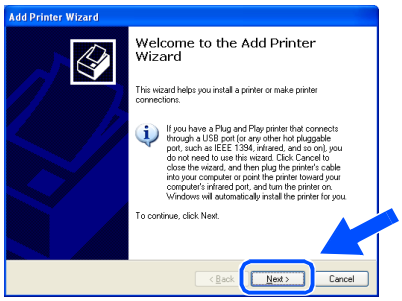
Add Printer Wizard
Welcome to the Add Printer Wizard
This wizard helps you install a printer or make printer connections.
To continue, click Next.
< Back
Next >
Cancel

22 Un-check the **Automatically detect and install my Plug and Play printer** selection and then click **Next**.

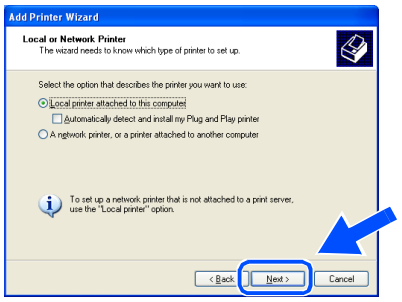
Add Printer Wizard
Local or Network Printer
The wizard needs to know which type of printer to set up.
Select the option that describes the printer you want to use:
Local printer attached to this computer
Automatically detect and install my Plug and Play printer
A network printer, or a printer attached to another computer
To set up a network printer that is not attached to a print server, use the "Local printer" option.
< Back
Next >
Cancel

23 Select **USBXXX** from the pull down window for the Printer Port Selection and then click **Next**.

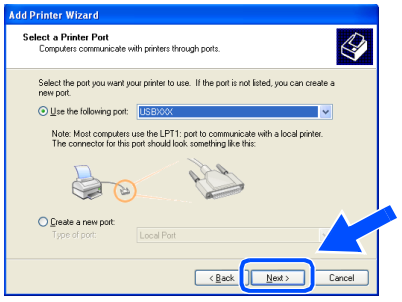
Add Printer Wizard
Select a Printer Port
Computers communicate with printers through ports.
Select the port you want your printer to use. If the port is not listed, you can create a new port.
Use the following port:
USB001
Note: Most computers use the LPT1: port to communicate with a local printer. The connector for this port should look something like this:
Create a new port:
Type of port:
Local Port
< Back
Next >
Cancel

24 Click on **Have Disk**.

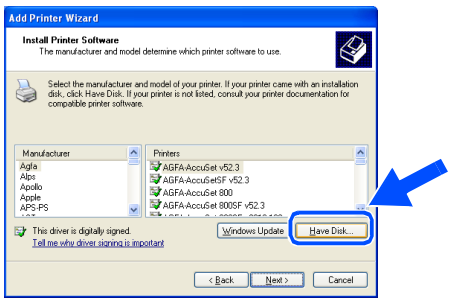
Add Printer Wizard
Install Printer Software
The manufacturer and model determine which printer software to use.
Select the manufacturer and model of your printer. If your printer came with an installation disk, click Have Disk. If your printer is not listed, consult your printer documentation for compatible printer software.
Manufacturer
Agfa
Alps
Apollo
Apple
APS-PS
Printers
AGFA-AccuSet v52.3
AGFA-AccuSetSF v52.3
AGFA-AccuSet 800
AGFA-AccuSet 800SF v52.3
This driver is digitally signed.
Tell me why driver signing is important
Windows Update
Have Disk...
< Back
Next >
Cancel

25 Browse the CD-ROM and highlight your language folder and click **Open**. Highlight the **WXP** folder and click **Open**. Highlight the **Addprt** folder and click **Open**.

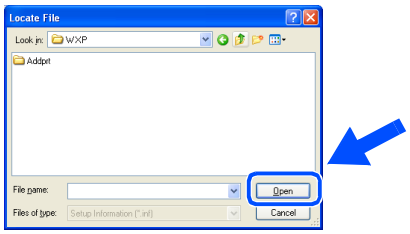

26 Click **Open**.

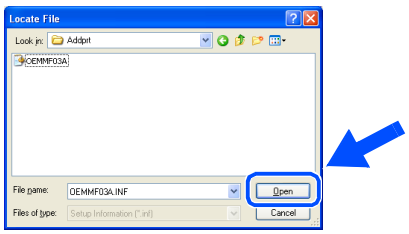

27 Make sure **X:\ENG\WXP\Addprt** is displayed in the window and click **OK** (X:\ is the drive letter of your CD-ROM).

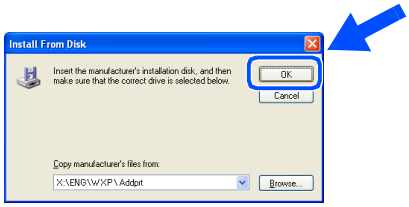

28 Highlight the model you are installing from the list of machines and click **Next**.

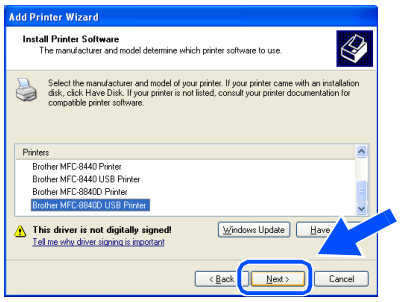
Add Printer Wizard
Install Printer Software
The manufacturer and model determine which printer software to use.
Select the manufacturer and model of your printer. If your printer came with an installation disk, click Have Disk. If your printer is not listed, consult your printer documentation for compatible printer software.
Printers
Brother MFC-8440 Printer
Brother MFC-8440 USB Printer
Brother MFC-8840D Printer
Brother MFC-8840D USB Printer
This driver is not digitally signed!
Tell me why driver signing is important
Windows Update
Have Disk...
< Back
Next >
Cancel

Please install USB printer.

29 The model you are installing will be listed in the window. Select **Yes** or **No** if you want this driver to be your default printer.

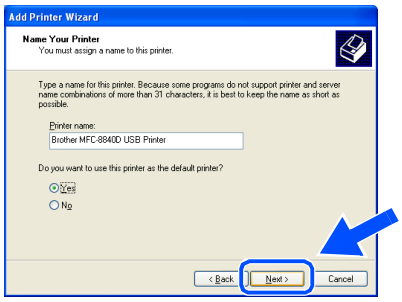
Add Printer Wizard
Name Your Printer
You must assign a name to this printer.
Type a name for this printer. Because some programs do not support printer and server name combinations of more than 31 characters, it is best to keep the name as short as possible.
Printer name:
Brother MFC-8840D USB Printer
Do you want to use this printer as the default printer?
Yes
No
< Back
Next >
Cancel

30 If this screen appears, select **Do not share this printer** and **Next**.

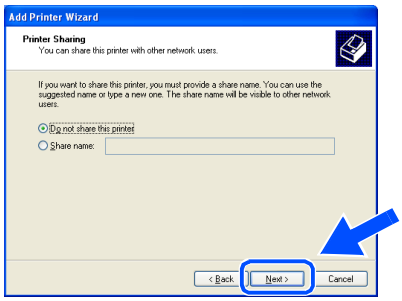
Add Printer Wizard
Printer Sharing
You can share this printer with other network users.
If you want to share this printer, you must provide a share name. You can use the suggested name or type a new one. The share name will be visible to other network users.
Do not share this printer
Share name:
< Back
Next >
Cancel

31 Select **Yes** and **Next** to print a test page.

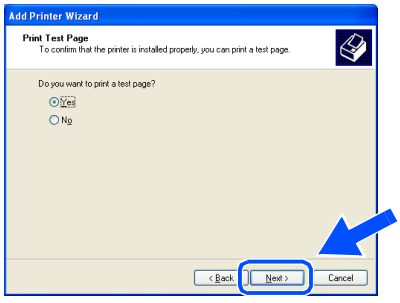
Add Printer Wizard
Print Test Page
To confirm that the printer is installed properly, you can print a test page.
Do you want to print a test page?
Yes
No
< Back
Next >
Cancel

32 When this screen appears, click **Finish**.

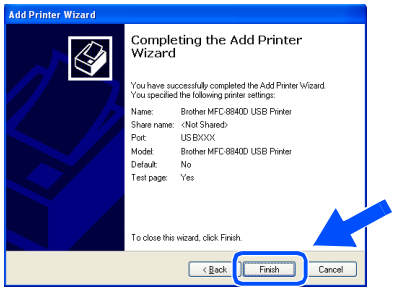

33 When the Windows Logo testing screen appears, click **Continue Anyway**.


Hardware Installation
The software you are installing for this hardware:
Printers
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

There will be two Brother printer drivers listed in the Printers selection.
The driver with "Printer" after the model name (ex. Brother MFC-8840D Printer) is the Brother Native Driver.

OK! **The Brother Native Drivers have been installed and the installation is now complete.**

Step 2 Installing the Driver & Software

For Parallel Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 2 - 8.

1. Switch off and unplug the MFC from the AC outlet and disconnect it from your computer, if you already connected an interface cable.

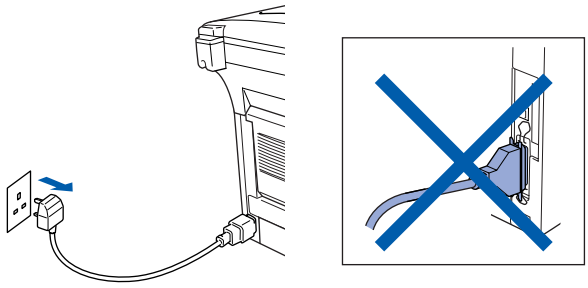

2. Turn on your computer.
(For Windows® 2000 Professional/XP, you must be logged on as the administrator.)

3. Insert the supplied CD-ROM for Windows® into your CD-ROM drive. If the model name screen appears, select your machine. If the language screen appears, select your language.

4. The CD-ROM main menu will appear. Click **Install Software**.

*If this window does not appear, use Windows® Explore to run the **setup.exe** program from the root directory of the Brother CD-ROM.*

5. Click **MFL-Pro Suite** in Main Application.

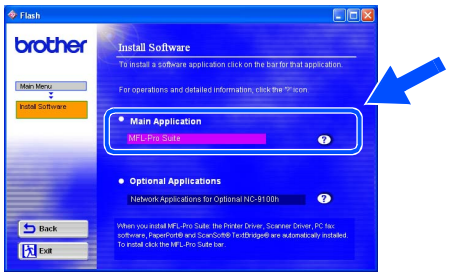

MFL-Pro Suite includes Printer Driver, Scanner Driver, ScanSoft® PaperPort®, ScanSoft® TextBridge®, PC-FAX software, Remote Setup and True Type fonts. PaperPort® is a document management application for viewing scanned documents. ScanSoft® TextBridge®, which is integrated into PaperPort®, is an OCR application that converts an image into text and inserts it into your default word processor.

6. Click **Install**.

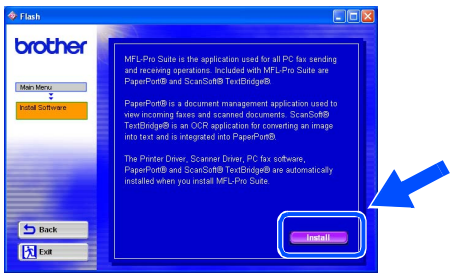

*If you see the following screen, click **OK** to install the Windows® updates. After the updates are installed your PC may restart. Note: If it does the installation will automatically continue.*


INST32
Some Windows updates need to be installed before the MFL-Pro Suite installation. To install the updates click OK.
If prompted, click OK to complete installation.
Note: The PC may restart. If it does the installation will continue automatically.
OK

*If the installation does not continue automatically, please open the installer menu again by double-clicking the **setup.exe** program from the root directory of the Brother CD-ROM, and continue from Step 4.*

7 When the PaperPort® 8.0 SE Setup window is displayed, click **Next**.

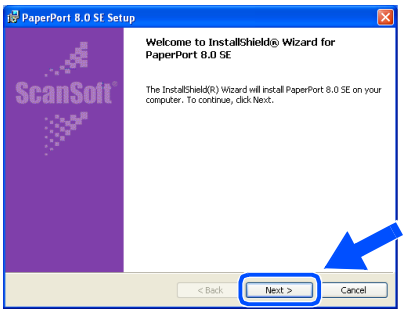
PaperPort 8.0 SE Setup
Welcome to InstallShield® Wizard for PaperPort 8.0 SE
The InstallShield(R) Wizard will install PaperPort 8.0 SE on your computer. To continue, click Next.
ScanSoft
< Back
Next >
Cancel

8 After reading and accepting the ScanSoft® License Agreement, enter your user information and click **Next**.

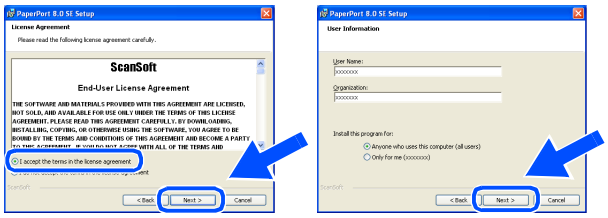

9 Select Typical and click **Next**.

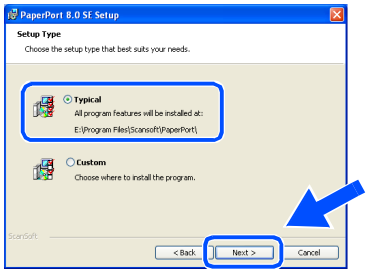

10 Click **Install** and PaperPort® will start installing on your computer.

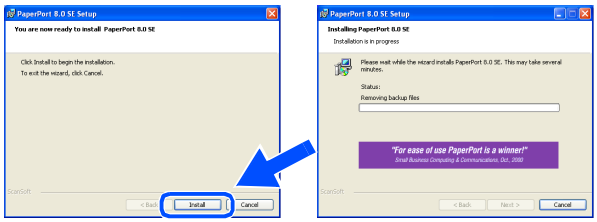
PaperPort 8.0 SE Setup
You are now ready to install PaperPort 8.0 SE
Click Install to begin the installation.
To exit the wizard, click Cancel.
Install
Cancel
PaperPort 8.0 SE Setup
Installing PaperPort 8.0 SE
Installation is in progress
Please wait while the wizard installs PaperPort 8.0 SE. This may take several minutes.
Status:
Removing backup files
"For ease of use PaperPort is a winner!"
Cancel

11 When the ScanSoft® Registration screen is displayed, make your selection and follow the on screen instructions.

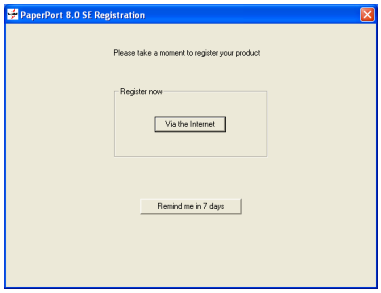
PaperPort 8.0 SE Registration
Please take a moment to register your product
Register now
Via the Internet
Remind me in 7 days

12 Click **Finish** to complete installation.

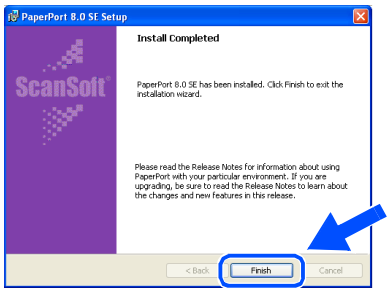
PaperPort 8.0 SE Setup
Install Completed
ScanSoft
PaperPort 8.0 SE has been installed. Click Finish to exit the installation wizard.
Please read the Release Notes for information about using PaperPort with your particular environment. If you are upgrading, be sure to read the Release Notes to learn about the changes and new features in this release.
< Back
Finish
Cancel

13 When the Brother MFL-Pro Suite Installation window appears, click **Next**.

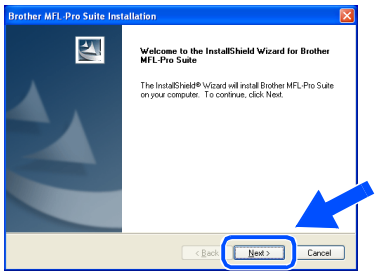
Brother MFL-Pro Suite Installation
Welcome to the InstallShield Wizard for Brother MFL-Pro Suite
The InstallShield® Wizard will install Brother MFL-Pro Suite on your computer. To continue, click Next.
< Back
Next >
Cancel

*If an error message appears at this point in the installation process, or if you have previously installed the MFL-Pro Suite, you will first have to uninstall it. From the **Start** menu, select **Programs**, **Brother**, **MFL-Pro Suite MFC-8840D**, **Uninstall**, and then follow the instructions on the screen.*

Continued ...

For Parallel Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

14 When the Brother Software License Agreement window appears, click **Yes**.

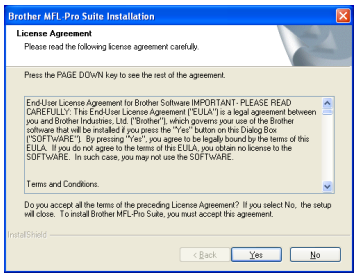
Brother MFL-Pro Suite Installation
License Agreement
Please read the following license agreement carefully.
Press the PAGE DOWN key to see the rest of the agreement.
Terms and Conditions.
Do you accept all the terms of the preceding License Agreement? If you select No, the setup will close. To install Brother MFL-Pro Suite, you must accept this agreement.
InstallShield
< Back
Yes
No

15 Select **Local Interface**, and then click **Next**.

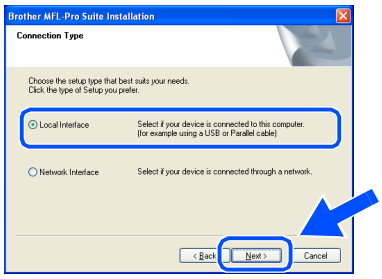
Brother MFL-Pro Suite Installation
Connection Type
Choose the setup type that best suits your needs.
Click the type of Setup you prefer.
Local Interface
Select if your device is connected to this computer.
(for example using a USB or Parallel cable)
Network Interface
Select if your device is connected through a network.
< Back
Next >
Cancel

16 Select **Standard**, and then click **Next**. The application files will be copied to your computer.

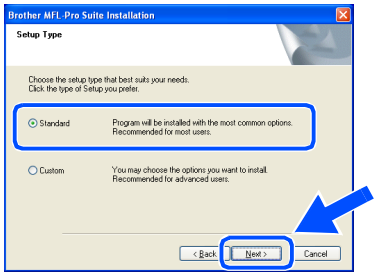
Brother MFL-Pro Suite Installation
Setup Type
Choose the setup type that best suits your needs.
Click the type of Setup you prefer.
Standard
Program will be installed with the most common options.
Recommended for most users.
Custom
You may choose the options you want to install.
Recommended for advanced users.
< Back
Next >
Cancel

*If you want to install the PS driver, select **Custom** and then follow the on-screen instructions. When the **Select Components** screen appears, check **PS Printer Driver**, and then continue following the on-screen instructions.*



Windows® 98/98SE/Me Users
→ Go to page 26
Windows® 2000 Professional Users
→ Go to page 27
Windows® XP Users
→ Go to page 31

For Windows® 98/98SE/Me Users Only

Make sure that you followed the instructions in 1 to 16 on pages 23 - 25.

17 When this screen appears, connect the parallel interface cable to your PC, and then connect it to the MFC.
Turn on the MFC by plugging in the power cord. Turn the power switch on.

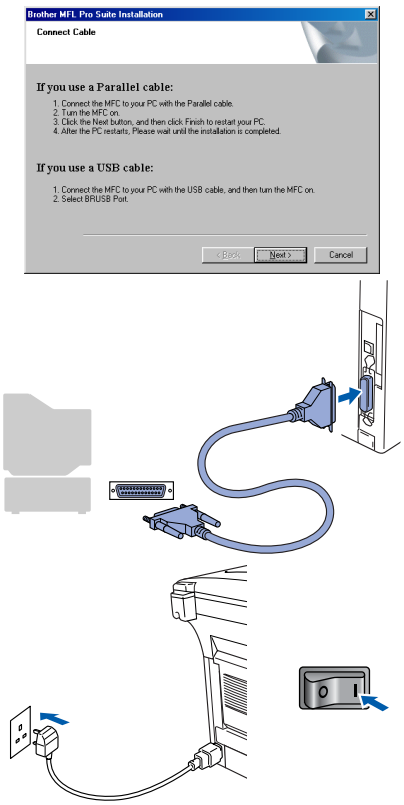
Brother MFL Pro Suite Installation
Connect Cable
If you use a Parallel cable:
1. Connect the MFC to your PC with the Parallel cable.
2. Turn the MFC on.
3. Click the Next button, and then click Finish to restart your PC.
4. After the PC restarts, Please wait until the installation is completed.
If you use a USB cable:
1. Connect the MFC to your PC with the USB cable, and then turn the MFC on.
2. Select BRUSB Port.
< Back
Next >
Cancel

18 Click **Next**.

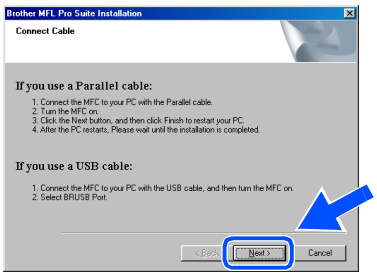
Brother MFL Pro Suite Installation
Connect Cable
If you use a Parallel cable:
1. Connect the MFC to your PC with the Parallel cable.
2. Turn the MFC on.
3. Click the Next button, and then click Finish to restart your PC.
4. After the PC restarts, Please wait until the installation is completed.
If you use a USB cable:
1. Connect the MFC to your PC with the USB cable, and then turn the MFC on.
2. Select BRUSB Port.
< Back
Next >
Cancel

19 The README.WRI file will be displayed. Please read this file for troubleshooting information and then close the file to continue installation.



20 Check the **Run On-Line Registration** and then click **Next**.

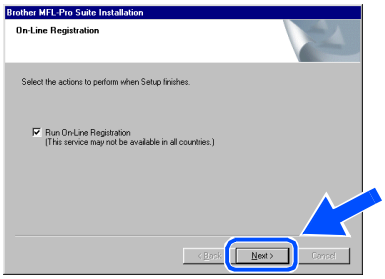
Brother MFL-Pro Suite Installation
On-Line Registration
Select the actions to perform when Setup finishes.
Run On-Line Registration
(This service may not be available in all countries.)
< Back
Next >
Cancel

21 Click **Finish** to restart your computer.

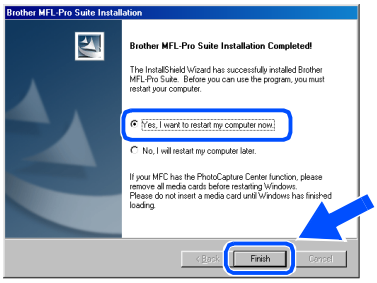
Brother MFL-Pro Suite Installation
Brother MFL-Pro Suite Installation Completed!
The InstallShield Wizard has successfully installed Brother MFL-Pro Suite. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
If your MFC has the PhotoCapture Center function, please remove all media cards before restarting Windows. Please do not insert a media card until Windows has finished loading.
< Back
Finish
Cancel

22 After the computer restarts, the installation of the Brother driver will automatically start. Follow the instructions on the screen.

23 Click **Yes** to have the Brother MFL-Pro Control Center load each time Windows® is started. The Control Center will appear as an icon in the task tray.
If you click **No** the Scan keys on the MFC will be disabled.

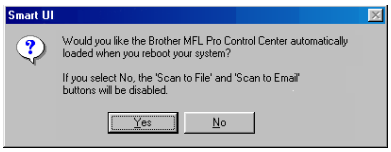
Smart UI
Would you like the Brother MFL Pro Control Center automatically loaded when you reboot your system?
If you select No, the 'Scan to File' and 'Scan to Email' buttons will be disabled.
Yes
No

- *If you checked the box in step 20, the screen for On-Line Registration will appear. Please complete your registration before proceeding to step 23.*
- *Even if you select **No**, you will be able to launch the Brother Control Center later to use the **Scan** key by double clicking the Smart UI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 14 in the Documentation (User's Guide) located on the CD-ROM.*

OK! **The Brother PC-FAX, Printer and Scanner drivers have been installed and the installation is now complete.**

For Parallel Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

For Windows® 2000 Professional Users Only

Make sure that you followed the instructions in 1 to 16 on pages 23 - 25.

17 When this screen appears, connect the parallel interface cable to your PC, and then connect it to the MFC.
Turn on the MFC by plugging in the power cord. Turn the power switch on.

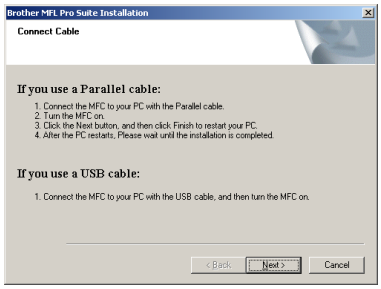
Brother MFL Pro Suite Installation
Connect Cable
If you use a Parallel cable:
1. Connect the MFC to your PC with the Parallel cable.
2. Turn the MFC on.
3. Click the Next button, and then click Finish to restart your PC.
4. After the PC restarts, Please wait until the installation is completed.
If you use a USB cable:
1. Connect the MFC to your PC with the USB cable, and then turn the MFC on.
< Back
Next >
Cancel

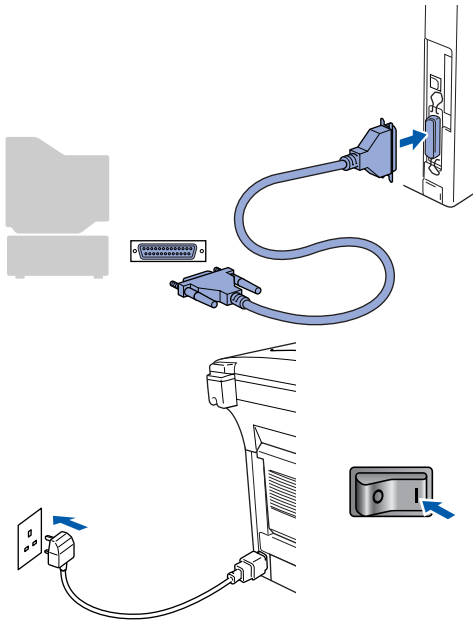

18 Click the **Next**.

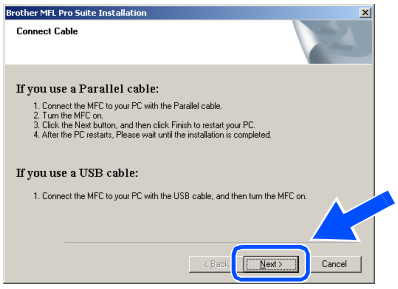
Brother MFL Pro Suite Installation
Connect Cable
If you use a Parallel cable:
1. Connect the MFC to your PC with the Parallel cable.
2. Turn the MFC on.
3. Click the Next button, and then click Finish to restart your PC.
4. After the PC restarts, Please wait until the installation is completed.
If you use a USB cable:
1. Connect the MFC to your PC with the USB cable, and then turn the MFC on.
< Back
Next >
Cancel

19 The README.WRI file will be displayed. Please read this file for troubleshooting information and then close the file to continue installation.

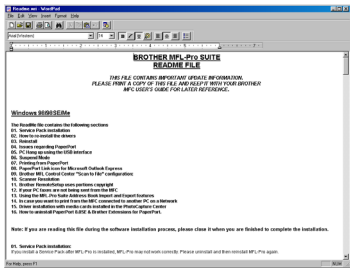

20 Check the **Run On-Line Registration** and then click **Next**.

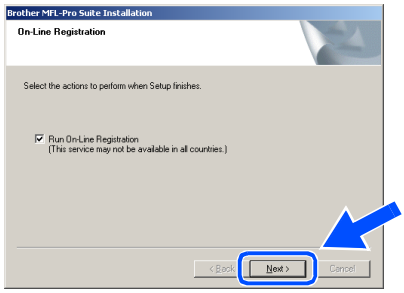
Brother MFL-Pro Suite Installation
On-Line Registration
Select the actions to perform when Setup finishes.
Run On-Line Registration
(This service may not be available in all countries.)
< Back
Next >
Cancel

21 Click **Finish** to restart your computer.

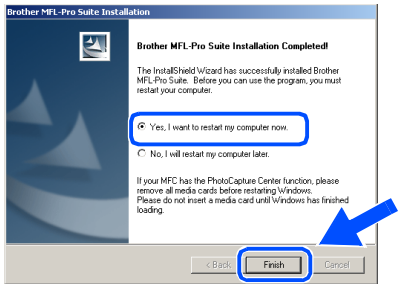
Brother MFL-Pro Suite Installation
Brother MFL-Pro Suite Installation Completed!
The InstallShield Wizard has successfully installed Brother MFL-Pro Suite. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
If your MFC has the PhotoCapture Center function, please remove all media cards before restarting Windows. Please do not insert a media card until Windows has finished loading.
< Back
Finish
Cancel

22 After the computer restarts, the installation of the Brother drivers will automatically start. Follow the instructions on the screen.

23 If the **Digital Signature Not Found** dialog boxes appear, click **Yes** to install the driver.





24 Click **Yes** to have the Control Center loaded each time Windows® is started. The Control Center will appear as an icon in the task tray.
If you click **No** the Scan keys on the MFC will be disabled.

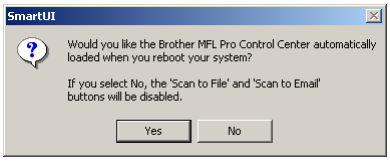
SmartUI
Would you like the Brother MFL Pro Control Center automatically loaded when you reboot your system?
If you select No, the 'Scan to File' and 'Scan to Email' buttons will be disabled.
Yes
No

- *If you checked the box in step 20, the screen for On-Line Registration will appear. Please complete your registration before proceeding to step 24.*
- *Even if you select **No**, later you will be able to launch the Brother Control Center to use the **Scan** key by double clicking the Smart UI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 14 in the Dcumentation (User's Guide) located on the CD-ROM.*

OK! **A Basic Universal printer driver was installed with the MFL-PRO Software Suite which is certified for use with Windows operating systems.**

Brother also offers a full featured printer driver (Native driver) that includes more features than the Basic Universal driver. However, this driver does not include a Windows certificate. To install the Brother Native driver proceed to step 25.

For details on what features are available see chapter 12 of the User's Guide.

Brother Native driver Installation

25 Click **Start** and select **Settings** and then **Printers**. Click on **Add a printer** and the Add Printer Wizard will start.
When this screen appears, click **Next**.

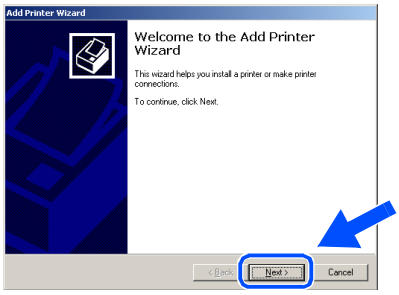
Add Printer Wizard
Welcome to the Add Printer Wizard
This wizard helps you install a printer or make printer connections.
To continue, click Next.
< Back
Next >
Cancel

26 Un-check the **Automatically detect and install my Plug and Play printer** selection and then click **Next**.

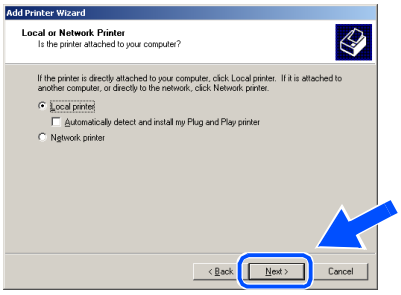
Add Printer Wizard
Local or Network Printer
Is the printer attached to your computer?
If the printer is directly attached to your computer, click Local printer. If it is attached to another computer, or directly to the network, click Network printer.
Local printer
Automatically detect and install my Plug and Play printer
Network printer
< Back
Next >
Cancel

27 Select **BMFC (Brother MFL Port)** from the pull down window for the Printer Port Selection and then click **Next**.

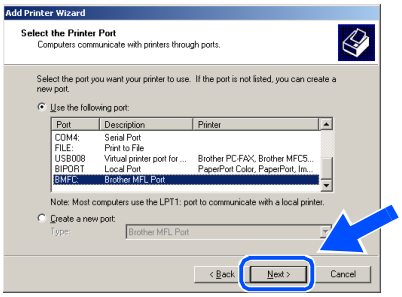

Continued ...

For Parallel Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

28 Click on **Have Disk**.

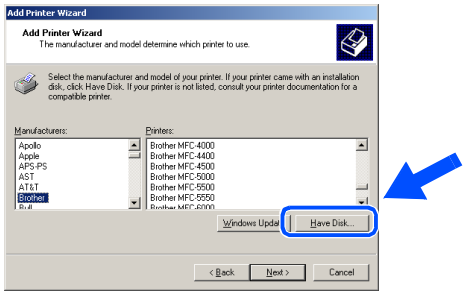

29 Browse the CD-ROM and highlight your language folder and click **Open**. Highlight the **W2K** folder and click **Open**. Highlight the **Addprt** folder and click **Open**.

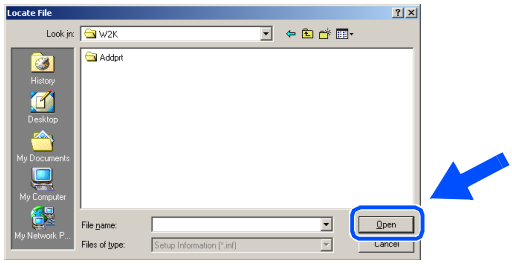

30 Click **Open**.

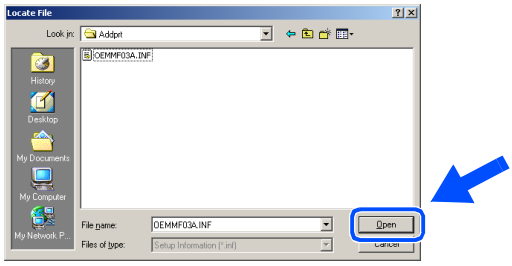

31 Make sure **X:\ENG\W2K\Addprt** is displayed in the window and click **OK** (X:\ is the drive letter of your CD-ROM).

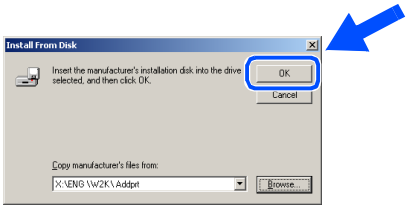

32 Highlight the model you are installing from the list of machines and click **Next**.

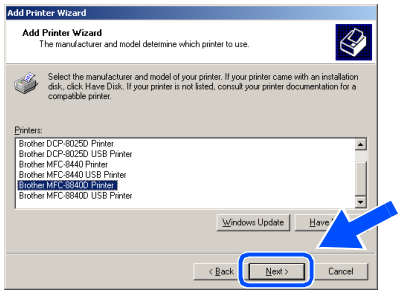
Add Printer Wizard
Add Printer Wizard
The manufacturer and model determine which printer to use.
Select the manufacturer and model of your printer. If your printer came with an installation disk, click Have Disk. If your printer is not listed, consult your printer documentation for a compatible printer.
Printers:
Brother DCP-8025D Printer
Brother DCP-8025D USB Printer
Brother MFC-8440 Printer
Brother MFC-8440 USB Printer
Brother MFC-8840D Printer
Brother MFC-8840D USB Printer
Windows Update
Have
< Back
Next >
Cancel

Do not install USB printer.

33 The model you are installing will be listed in the window. Select **Yes** or **No** if you want this driver to be your default printer.

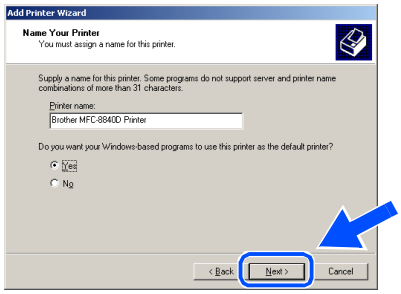
Add Printer Wizard
Name Your Printer
You must assign a name for this printer.
Supply a name for this printer. Some programs do not support server and printer name combinations of more than 31 characters.
Printer name:
Brother MFC-8840D Printer
Do you want your Windows-based programs to use this printer as the default printer?
Yes
No
< Back
Next >
Cancel

34 If this screen appears, select **Do not share this printer** and **Next**.

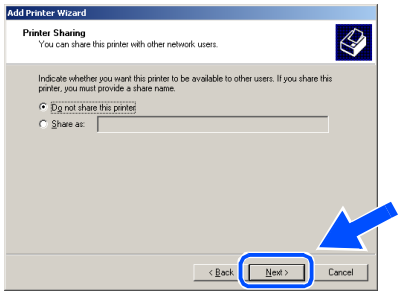
Add Printer Wizard
Printer Sharing
You can share this printer with other network users.
Indicate whether you want this printer to be available to other users. If you share this printer, you must provide a share name.
Do not share this printer
Share as:
< Back
Next >
Cancel

35 Select **Yes** and **Next** to print a test page.

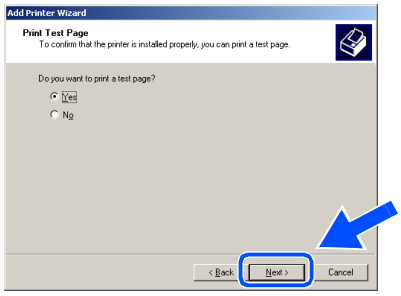
Add Printer Wizard
Print Test Page
To confirm that the printer is installed properly, you can print a test page.
Do you want to print a test page?
Yes
No
< Back
Next >
Cancel

36 When this screen appears, click **Finish**.

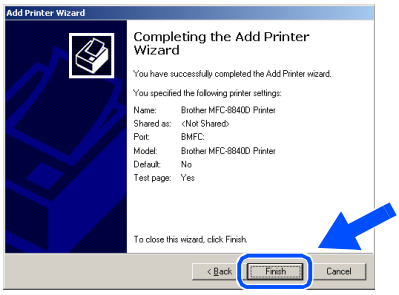

37 If the Digital Signature Not Found dialog box appears, click **Yes**.


Digital Signature Not Found
The Microsoft digital signature affirms that software has been tested with Windows and that the software has not been altered since it was tested.
The software you are about to install does not contain a Microsoft digital signature. Therefore, there is no guarantee that this software works correctly with Windows.
Printers
If you want to search for Microsoft digitally signed software, visit the Windows Update Web site at http://windowsupdate.microsoft.com/ to see if one is available.
Do you want to continue the
Yes
No
More Info

38 If the test page printed, click **OK**.


Brother MFC-8840D Printer on IDCS144A
A test page is now being sent to the printer. Depending on the speed of your printer, it may take a minute or two before the page is printed.
The test page briefly demonstrates the printer's ability to print graphics and text, and it provides technical information about the printer driver.
If the test page printed, click OK.
If the test page did not print, click Troubleshoot.
OK
Troubleshoot...

There will be two Brother printer drivers listed in the Printers selection.
The driver with "Printer" after the model name (ex. Brother MFC-8840D Printer) is the Brother Native Driver.

The Brother Native Drivers have been installed and the installation is now complete.

For Parallel Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

For Windows® XP Users Only

Make sure that you followed the instructions in 1 to 16 on pages 23 - 25.

17 When this screen appears, connect the parallel interface cable to your PC, and then connect it to the MFC.
Turn on the MFC by plugging in the power cord. Turn the power switch on.


Brother MFL-Pro Suite Installation
Connect Cable
If you use a Parallel cable:
1. Connect the MFC to your PC with the Parallel cable.
2. Turn the MFC on.
3. Wait for the installation process to continue.
If you use a USB cable:
1. Connect the MFC to your PC with the USB cable, and then turn the MFC on.
2. Wait for the installation process to continue.
* Some windows will open and close during the installation process.
< Back
Next >
Cancel

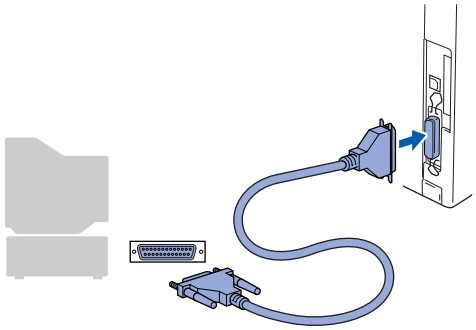

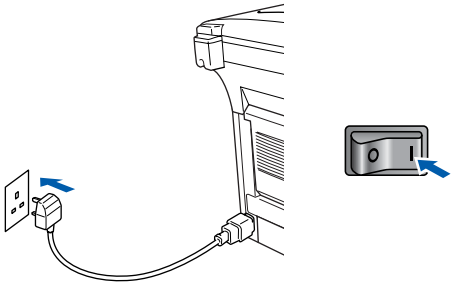

The installation of the Brother drivers will automatically start. The screen appears one after another, please wait for a while.

18 The README.WRI file will be displayed. Please read this file for troubleshooting information and then close the file to continue installation.

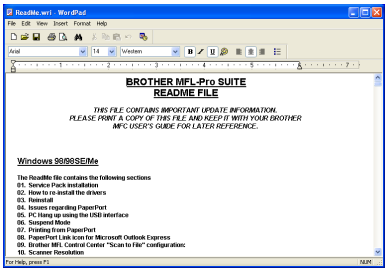
ReadMe.wri - WordPad
BROTHER MFL-Pro SUITE
README FILE
THIS FILE CONTAINS IMPORTANT UPDATE INFORMATION.
PLEASE PRINT A COPY OF THIS FILE AND KEEP IT WITH YOUR BROTHER
MFC USER'S GUIDE FOR LATER REFERENCE.
Windows 98/98SE/Me
The Readme file contains the following sections
01. Service Pack installation
02. How to re-install the drivers
03. Reinstall
04. Issues regarding PaperPort
05. PC Hang up using the USB interface
06. Suspend Mode
07. Printing from PaperPort
08. PaperPort Link Icon for Microsoft Outlook Express
09. Brother MFL Control Center "Scan to File" configuration
10. Scanner Resolution

19 Check the **Run On-Line Registration** and then click **Next**.

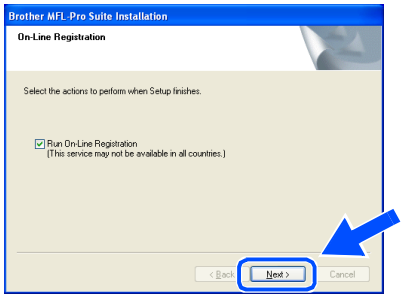
Brother MFL-Pro Suite Installation
On-Line Registration
Select the actions to perform when Setup finishes.
Run On-Line Registration
(This service may not be available in all countries.)
< Back
Next >
Cancel

20 When the following screen appears, click **Finish** and wait as the PC restarts Windows and continues the installation.

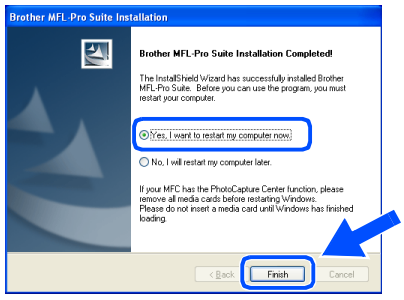
Brother MFL-Pro Suite Installation
Brother MFL-Pro Suite Installation Completed!
The InstallShield Wizard has successfully installed Brother MFL-Pro Suite. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
If your MFC has the PhotoCapture Center function, please remove all media cards before restarting Windows.
Please do not insert a media card until Windows has finished loading.
< Back
Finish
Cancel

If you checked the box in step 19, the screen for On-Line Registration will appear. Please complete your registration before proceeding to step 20.

OK! **A Basic Universal printer driver was installed with the MFL-PRO Software Suite which is certified for use with Windows operating systems.**

Brother also offers a full featured printer driver (Native driver) that includes more features than the Basic Universal driver. However, this driver does not include a Windows certificate. To install the Brother Native driver proceed to step 21.

For details on what features are available see chapter 12 of the User's Guide.

Brother Native driver Installation

21 Click **Start** and select **Printers and Faxes**. Click on **Add a printer** and the Add Printer Wizard will start.
When this screen appears, click **Next**.

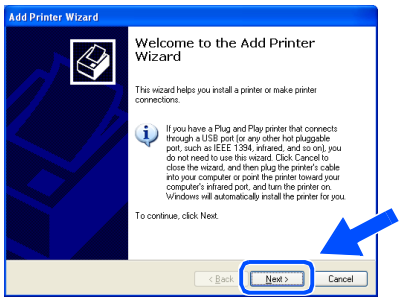
Add Printer Wizard
Welcome to the Add Printer Wizard
This wizard helps you install a printer or make printer connections.
To continue, click Next.
< Back
Next >
Cancel

22 Un-check the **Automatically detect and install my Plug and Play printer** selection and then click **Next**.

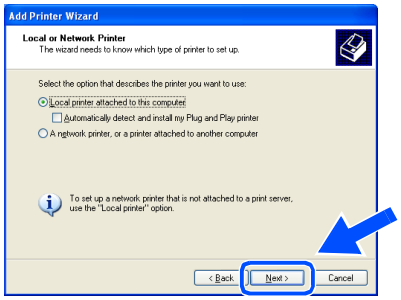
Add Printer Wizard
Local or Network Printer
The wizard needs to know which type of printer to set up.
Select the option that describes the printer you want to use:
Local printer attached to this computer
Automatically detect and install my Plug and Play printer
A network printer, or a printer attached to another computer
To set up a network printer that is not attached to a print server, use the "Local printer" option.
< Back
Next >
Cancel

23 Select **BMFC (Brother MFL Port)** from the pull down window for the Printer Port Selection and then click **Next**.

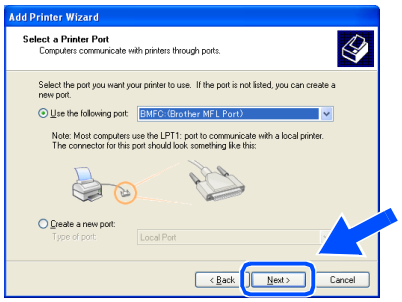
Add Printer Wizard
Select a Printer Port
Computers communicate with printers through ports.
Select the port you want your printer to use. If the port is not listed, you can create a new port.
Use the following port:
BMFC (Brother MFL Port)
Note: Most computers use the LPT1: port to communicate with a local printer. The connector for this port should look something like this:
Create a new port:
Type of port:
Local Port
< Back
Next >
Cancel

24 Click on **Have Disk**.

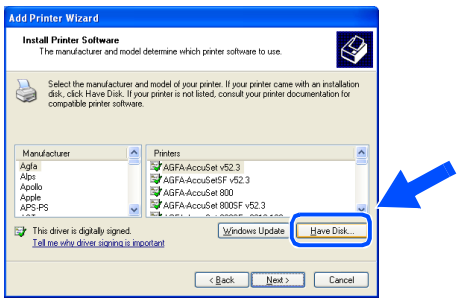
Add Printer Wizard
Install Printer Software
The manufacturer and model determine which printer software to use.
Select the manufacturer and model of your printer. If your printer came with an installation disk, click Have Disk. If your printer is not listed, consult your printer documentation for compatible printer software.
Manufacturer
Agfa
Alps
Apollo
Apple
APS-PS
Printers
AGFA-AccuSet v52.3
AGFA-AccuSetSF v52.3
AGFA-AccuSet 800
AGFA-AccuSet 800SF v52.3
This driver is digitally signed.
Tell me why driver signing is important
Windows Update
Have Disk...
< Back
Next >
Cancel

25 Browse the CD-ROM and highlight your language folder and click **Open**. Highlight the **WXP** folder and click **Open**. Highlight the **Addprt** folder and click **Open**.

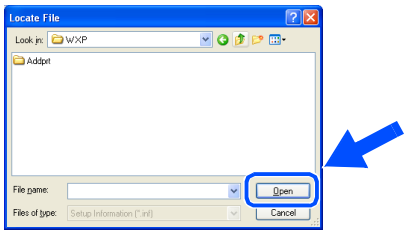

26 Click **Open**.

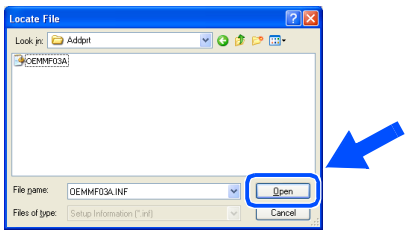

27 Make sure **X:\ENG\WXP\Addprt** is displayed in the window and click **OK** (X:\ is the drive letter of your CD-ROM).

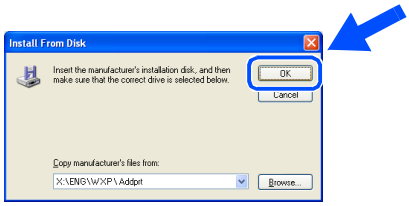

Continued ...

For Parallel Interface Cable Users (For Windows® 98/98SE/Me/2000 Professional/XP)

28 Highlight the model you are installing from the list of machines and click **Next**.

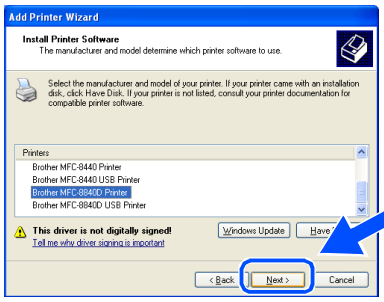
Add Printer Wizard
Install Printer Software
The manufacturer and model determine which printer software to use.
Select the manufacturer and model of your printer. If your printer came with an installation disk, click Have Disk. If your printer is not listed, consult your printer documentation for compatible printer software.
Printers
Brother MFC-8440 Printer
Brother MFC-8440 USB Printer
Brother MFC-8840D Printer
Brother MFC-8840D USB Printer
This driver is not digitally signed!
Tell me why driver signing is important
Windows Update
Have Disk...
< Back
Next >
Cancel

Do not install USB printer.

29 The model you are installing will be listed in the window. Select **Yes** or **No** if you want this driver to be your default printer.

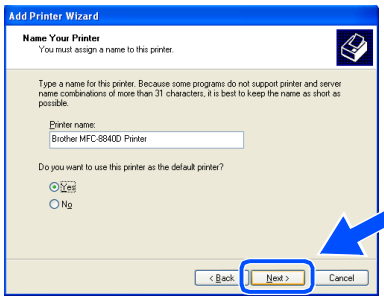
Add Printer Wizard
Name Your Printer
You must assign a name to this printer.
Type a name for this printer. Because some programs do not support printer and server name combinations of more than 31 characters, it is best to keep the name as short as possible.
Printer name:
Brother MFC-8840D Printer
Do you want to use this printer as the default printer?
Yes
No
< Back
Next >
Cancel

30 If this screen appears, select **Do not share this printer** and **Next**.

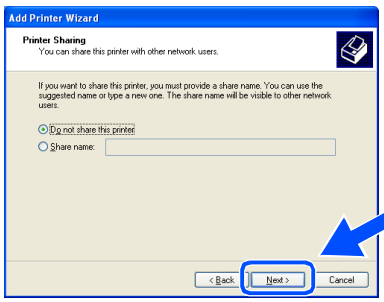
Add Printer Wizard
Printer Sharing
You can share this printer with other network users.
If you want to share this printer, you must provide a share name. You can use the suggested name or type a new one. The share name will be visible to other network users.
Do not share this printer
Share name:
< Back
Next >
Cancel

31 Select **Yes** and **Next** to print a test page.

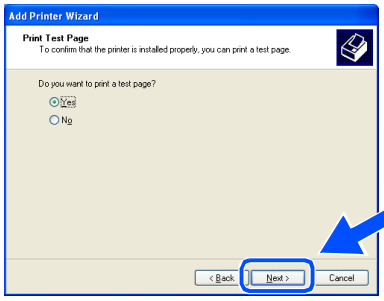
Add Printer Wizard
Print Test Page
To confirm that the printer is installed properly, you can print a test page.
Do you want to print a test page?
Yes
No
< Back
Next >
Cancel

32 When this screen appears, click **Finish**.

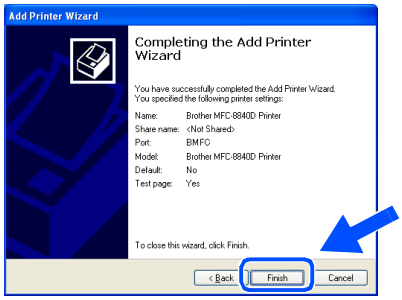

33 When the Windows Logo testing screen appears, click **Continue Anyway**.


Hardware Installation
The software you are installing for this hardware:
Printers
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

There will be two Brother printer drivers listed in the Printers selection.
The driver with "Printer" after the model name (ex. Brother MFC-8840D Printer) is the Brother Native Driver.

OK! **The Brother Native Drivers have been installed and the installation is now complete.**

For Windows NT® Workstation Version 4.0 Users

Make sure that you followed the instructions from Step 1 “Setting Up the Machine” on pages 2 - 8.

1. Turn on your computer.
You must be logged on as the Administrator.

2. Connect the parallel interface cable to your computer, and then connect it to the MFC.

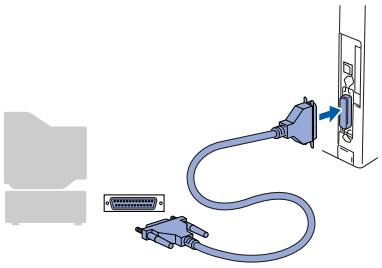

3. Make sure you turn on the MFC by plugging in the power cord, and turning the power switch on.

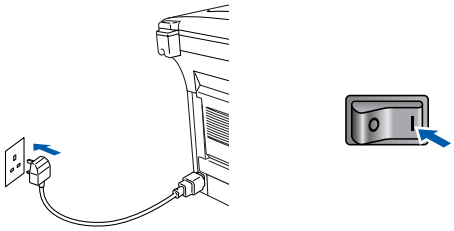

4. Insert the Supplied CD-ROM for Windows® into your CD-ROM drive. If the model name screen appears, select your machine. If the language screen appears, select your language.

5. The CD-ROM main menu will appear. Click **Install Software**.

*If this window does not appear, use Windows® Explore to run the **setup.exe** program from the root directory of the Brother CD-ROM.*

6. Click **MFL-Pro Suite** in Main Application.

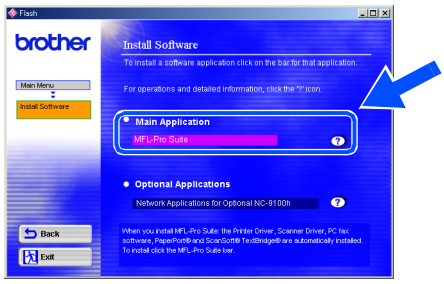

MFL-Pro Suite includes Printer Driver, Scanner Driver, ScanSoft® PaperPort®, ScanSoft® TextBridge®, PC-FAX software, Remote Setup and True Type fonts. PaperPort® is a document management application for viewing scanned documents. ScanSoft® TextBridge®, which is integrated into PaperPort®, is an OCR application that converts an image into text and inserts it into your default word processor.

7. Click **Install**.

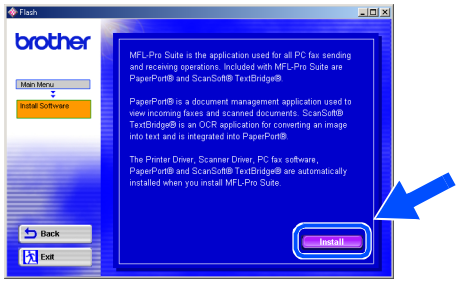

*If you see the following screen, click **OK** to install the Windows® updates. After the updates are installed your PC may restart. Note: If it does the installation will automatically continue.*



*If the installation does not continue automatically, please open the installer menu again by double-clicking the **setup.exe** program on the Brother CD-ROM, and continue from Step 5.*

Continued ...

For Windows NT® Workstation Version 4.0 Users

8 When the PaperPort® 8.0 SE Setup window is displayed, click **Next**.

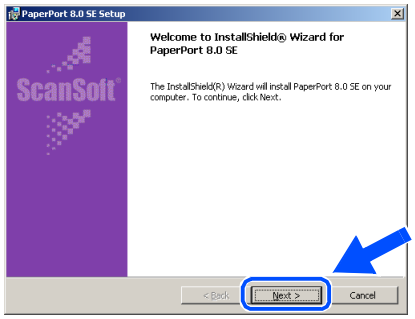
PaperPort 8.0 SE Setup
Welcome to InstallShield® Wizard for PaperPort 8.0 SE
The InstallShield(R) Wizard will install PaperPort 8.0 SE on your computer. To continue, click Next.
ScanSoft
< Back
Next >
Cancel

9 After reading and accepting the ScanSoft® License Agreement, enter your user information and click **Next**.

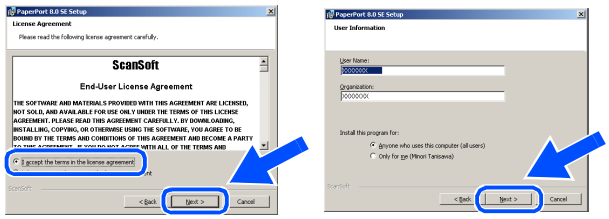

10 Select Typical and click **Next**.

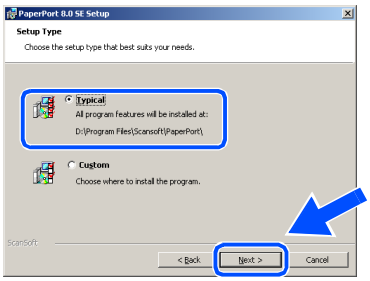

11 Click **Install** and PaperPort® will start installing on your computer.

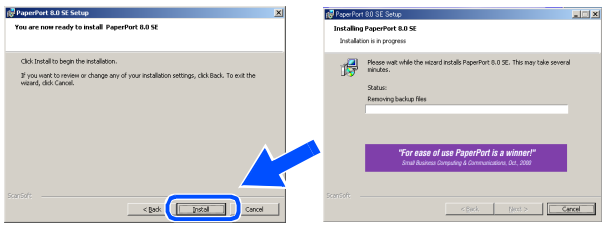
PaperPort 8.0 SE Setup
You are now ready to install PaperPort 8.0 SE
Click Install to begin the installation.
< Back
Install
Cancel
PaperPort 8.0 SE Setup
Installing PaperPort 8.0 SE
Installation is in progress
Please wait while the wizard installs PaperPort 8.0 SE. This may take several minutes.
Status:
Removing backup files
"For ease of use PaperPort is a winner!"
Next >
Cancel

12 When the ScanSoft® Registration screen is displayed, make your selection and follow the on screen instructions.

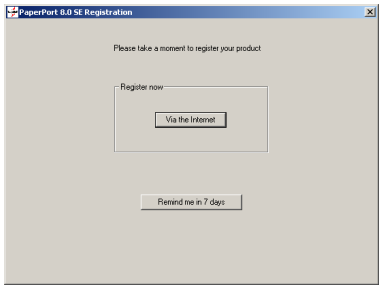
PaperPort 8.0 SE Registration
Please take a moment to register your product
Register now
Via the Internet
Remind me in 7 days

13 Click **Finish** to complete installation.

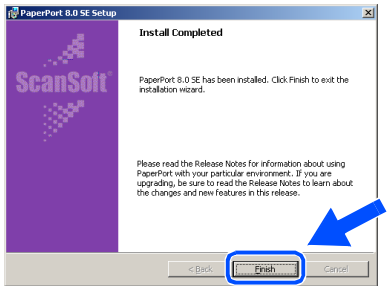
PaperPort 8.0 SE Setup
Install Completed
ScanSoft
PaperPort 8.0 SE has been installed. Click Finish to exit the installation wizard.
Please read the Release Notes for information about using PaperPort with your particular environment. If you are upgrading, be sure to read the Release Notes to learn about the changes and new features in this release.
< Back
Finish
Cancel

14 When the Brother MFL-Pro Suite Installation window appears, click **Next**.

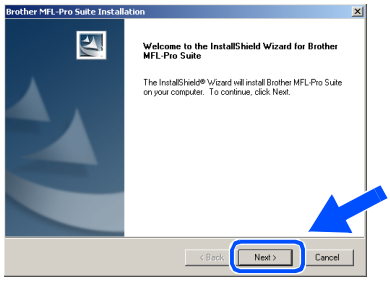
Brother MFL-Pro Suite Installation
Welcome to the InstallShield Wizard for Brother MFL-Pro Suite
The InstallShield® Wizard will install Brother MFL-Pro Suite on your computer. To continue, click Next.
< Back
Next >
Cancel

*If an error message appears at this point in the installation process, or you have previously installed MFL-Pro Suite, you will first have to uninstall it. From the **Start** menu, select **Programs**, **Brother**, **MFL-Pro Suite MFC-8840D**, **Uninstall**, and then follow the instructions on the screen.*

15 When the Brother Software License Agreement window appears, click **Yes** If you agree to it and go to next screen.

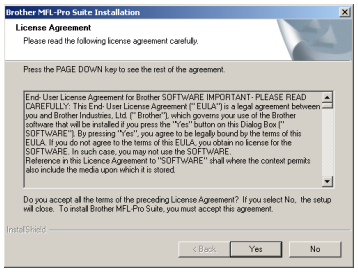
Brother MFL-Pro Suite Installation
License Agreement
Please read the following license agreement carefully.
Press the PAGE DOWN key to see the rest of the agreement.
Do you accept all the terms of the preceding License Agreement? If you select No, the setup will close. To install Brother MFL-Pro Suite, you must accept this agreement.
InstallShield
< Back
Yes
No

16 Select **Local Interface**, and then click **Next**.

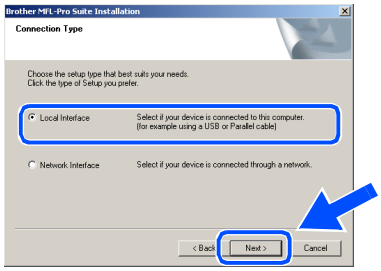
Brother MFL-Pro Suite Installation
Connection Type
Choose the setup type that best suits your needs.
Click the type of Setup you prefer.
Local Interface
Select if your device is connected to this computer. (for example using a USB or Parallel cable)
Network Interface
Select if your device is connected through a network.
< Back
Next >
Cancel

17 When the Setup Type window appears, select **Standard**, and then click **Next**.

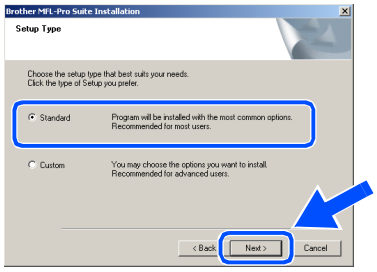
Brother MFL-Pro Suite Installation
Setup Type
Choose the setup type that best suits your needs.
Click the type of Setup you prefer.
Standard
Program will be installed with the most common options. Recommended for most users.
Custom
You may choose the options you want to install. Recommended for advanced users.
< Back
Next >
Cancel

*If you want to install the PS driver, select **Custom** and then follow the on-screen instructions. When the **Select Components** screen appears, check **PS Printer Driver**, and then continue following the on-screen instructions.*

18 The README.WRI file will be displayed. Please read this file for troubleshooting information and then close the file to continue installation.

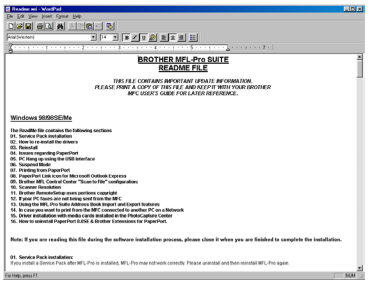

19 Check the **Run On-Line Registration** and then click **Next**.

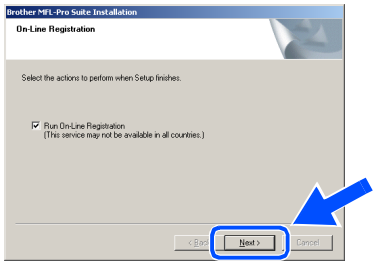
Brother MFL-Pro Suite Installation
On-Line Registration
Select the actions to perform when Setup finishes.
Run On-Line Registration
(This service may not be available in all countries.)
< Back
Next >
Cancel

20 Click **Finish** to restart your computer.

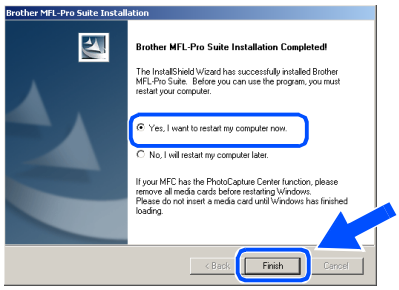
Brother MFL-Pro Suite Installation
Brother MFL-Pro Suite Installation Completed!
The InstallShield Wizard has successfully installed Brother MFL-Pro Suite. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
If your MFC has the PhotoCapture Center function, please remove all media cards before restarting Windows. Please do not insert a media card until Windows has finished loading.
< Back
Finish
Cancel

21 After the computer restarts, click **Yes** to have the Control Center load each time Windows® is started. The Control Center will appear as an icon in the task tray. If you click **No** the Scan keys on the MFC will be disabled.

SmartUI
Would you like the Brother MFL Pro Control Center automatically loaded when you reboot your system?
If you select No, the 'Scan to File' and 'Scan to Email' buttons will be disabled.
Yes
No

- *If you checked the box in step 19, the screen for On-Line Registration will appear. Please complete your registration before proceeding to step 21.*
- *Even if you select **No**, you will be able to launch the Brother Control Center later to use the **Scan** key by double clicking the Smart UI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 14 in the Documentation (User's Guide) located on the CD-ROM.*

OK! **The Brother PC-FAX, Printer and Scanner drivers have been installed and the installation is now complete.**

Step 2 Installing the Driver & Software

For Network Interface Cable Users (For Windows® 98/98SE/Me/NT/2000 Professional/XP)

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 2 - 8.

1. Make sure that the NC-9100h (Network Print/Fax Server) is installed into the MFC. *(See Optional accessories in Chapter 23 of the User's Guide.)*

2. Connect the network cable to the MFC, and then connect it to a free port on your hub. Turn on the MFC by plugging in the power cord. Turn the power switch on.

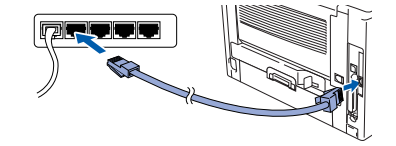

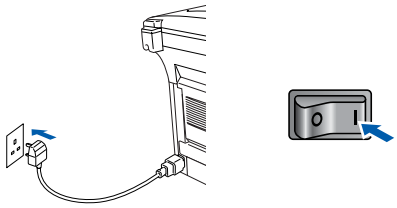

3. Turn on your computer. (For Windows® 2000 Professional/XP/ Windows NT® 4.0, you must be logged on as the administrator.)

4. Insert the supplied CD-ROM for Windows® into your CD-ROM drive. If the model neme screen appears, select your machine. If the language screen appears, select your language.

5. The CD-ROM main menu will appear. Click **Install Software**.

*If this window does not appear, use Windows® Explorer to run the **setup.exe** program from the root directory of the Brother CD-ROM.*

6. Click **MFL-Pro Suite** in Main Application.

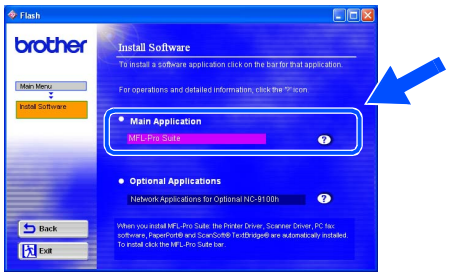

MFL-Pro Suite includes Printer Driver, Scanner Driver, ScanSoft® PaperPort®, ScanSoft® TextBridge®, PC-FAX software, and True Type fonts. PaperPort® is a document management application for viewing scanned documents. ScanSoft® TextBridge®, which is integrated into PaperPort®, is an OCR application that converts an image into text and inserts it into your default word processor.

7. Click **Install**.

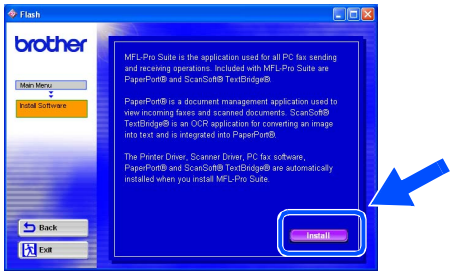

*If you see the following screen, click **OK** to install the Windows® updates. After the updates are installed your PC may restart. Note: If it does the installation will automatically continue.*


INST32
Some Windows updates need to be installed before the MFL-Pro Suite installation. To install the updates click OK.
If prompted, click OK to complete installation.
Note: The PC may restart. If it does the installation will continue automatically.
OK

*If the installation does not continue automatically, please open the installer menu again by double-clicking the **setup.exe** program from the root directory of the Brother CD-ROM, and continue from Step 4.*

8 When the PaperPort® 8.0 SE Setup window is displayed, click **Next**.

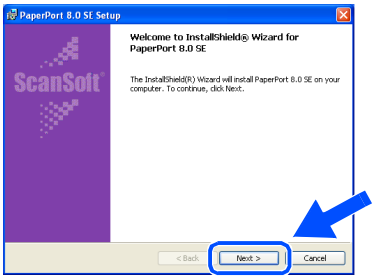
PaperPort 8.0 SE Setup
ScanSoft
Welcome to InstallShield® Wizard for PaperPort 8.0 SE
The InstallShield(R) Wizard will install PaperPort 8.0 SE on your computer. To continue, click Next.
< Back
Next >
Cancel

9 After reading and accepting the ScanSoft® License Agreement, enter your user information and click **Next**.

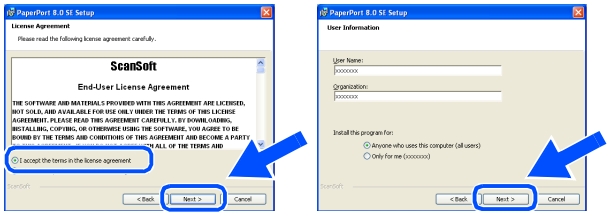

10 Select **Typical** and click **Next**.

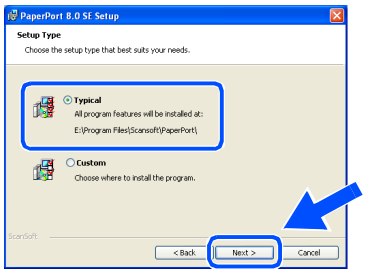

11 Click **Install** and PaperPort® will start installing on your computer.

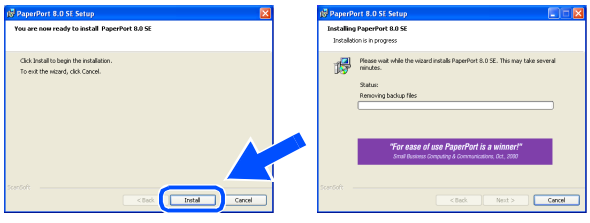
PaperPort 8.0 SE Setup
You are now ready to install PaperPort 8.0 SE
Click Install to begin the installation.
To exit the wizard, click Cancel.
Install
Cancel
PaperPort 8.0 SE Setup
Installing PaperPort 8.0 SE
Installation is in progress
Please wait while the wizard installs PaperPort 8.0 SE. This may take several minutes.
Status:
Removing backup files
"For ease of use PaperPort is a winner!"
Cancel

12 When the ScanSoft® Registration screen is displayed, make your selection and follow the on screen instructions.


PaperPort 8.0 SE Registration
Please take a moment to register your product
Register now
Via the Internet
Remind me in 7 days

13 Click **Finish** to complete installation.

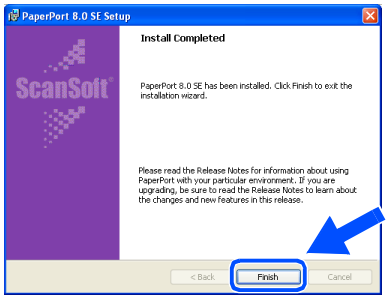
PaperPort 8.0 SE Setup
ScanSoft
Install Completed
PaperPort 8.0 SE has been installed. Click Finish to exit the installation wizard.
Please read the Release Notes for information about using PaperPort with your particular environment. If you are upgrading, be sure to read the Release Notes to learn about the changes and new features in this release.
< Back
Finish
Cancel

14 When the Brother MFL-Pro Suite Installation window appears, click **Next**.

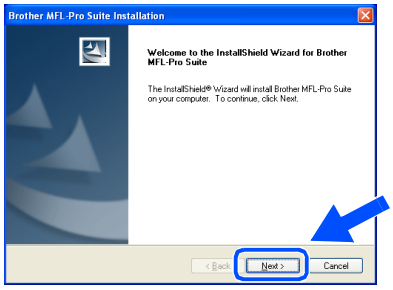
Brother MFL-Pro Suite Installation
Welcome to the InstallShield Wizard for Brother MFL-Pro Suite
The InstallShield® Wizard will install Brother MFL-Pro Suite on your computer. To continue, click Next.
< Back
Next >
Cancel

*If an error message appears at this point in the installation process, you will first have to uninstall MFL-Pro Suite. From the **Start** menu, select **Programs**, **Brother**, **MFL-Pro Suite MFC-8840D**, **Uninstall**, and then follow the instructions on the screen.*

15 When the Brother Software License Agreement window appears, click **Yes**.

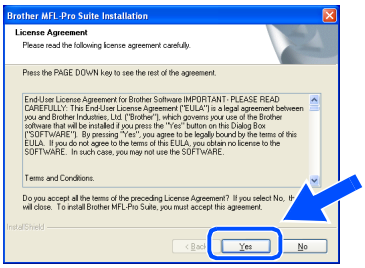
Brother MFL-Pro Suite Installation
License Agreement
Please read the following license agreement carefully.
Press the PAGE DOWN key to see the rest of the agreement.
End-User License Agreement for Brother Software IMPORTANT- PLEASE READ CAREFULLY: This End-User License Agreement ("EULA") is a legal agreement between you and Brother Industries, Ltd. ("Brother"), which governs your use of the Brother software that will be installed if you press the "Yes" button on the Dialog Box ("SOFTWARE"). By pressing "Yes", you agree to be legally bound by the terms of this EULA. If you do not agree to the terms of this EULA, you obtain no license to the SOFTWARE. In such case, you may not use the SOFTWARE.
Terms and Conditions.
Do you accept all the terms of the preceding License Agreement? If you select No, the will close. To install Brother MFL-Pro Suite, you must accept this agreement.
InstallShield
< Back
Yes
No

Continued ...

For Network Interface Cable Users (For Windows® 98/98SE/Me/NT/2000 Professional/XP)

16 Select **Network Interface**, and then click **Next**.

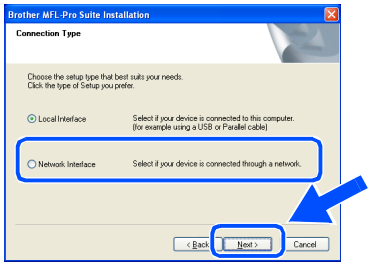
Brother MFL-Pro Suite Installation
Connection Type
Choose the setup type that best suits your needs.
Click the type of Setup you prefer.
Local Interface
Select if your device is connected to this computer.
(for example using a USB or Parallel cable)
Network Interface
Select if your device is connected through a network.
< Back
Next >
Cancel

17 Select **Standard**, and then click **Next**. The application files will be copied to your computer.

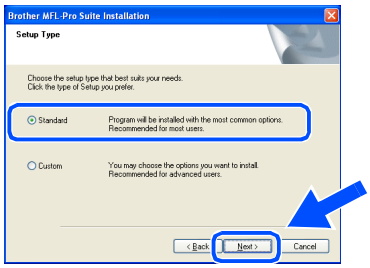
Brother MFL-Pro Suite Installation
Setup Type
Choose the setup type that best suits your needs.
Click the type of Setup you prefer.
Standard
Program will be installed with the most common options.
Recommended for most users.
Custom
You may choose the options you want to install.
Recommended for advanced users.
< Back
Next >
Cancel

*If you want to install the PS driver, select **Custom** and then follow the on-screen instructions. When the **Select Components** screen appears, check **PS Printer Driver**, and then continue following the on-screen instructions.*

18 Select **Search the network for devices and choose from a list of discovered devices**, and then click **Next**.

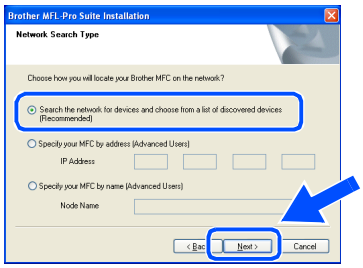
Brother MFL-Pro Suite Installation
Network Search Type
Choose how you will locate your Brother MFC on the network?
Search the network for devices and choose from a list of discovered devices
(Recommended)
Specify your MFC by address (Advanced Users)
IP Address
Specify your MFC by name (Advanced Users)
Node Name
< Back
Next >
Cancel

*If you see the following screen, click **OK**.*

19 If the MFC is un-configured for your network:

Select the un-configured device or APIPA from the list and then click **Next**.
→ **Go to** 20

If the MFC is configured for your network:

Select the MFC from the list and then click **Next**. → **Go to** 23

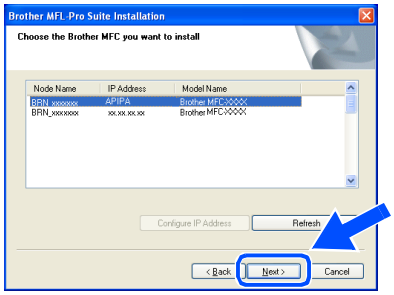

20 Click **Configure IP Address**.

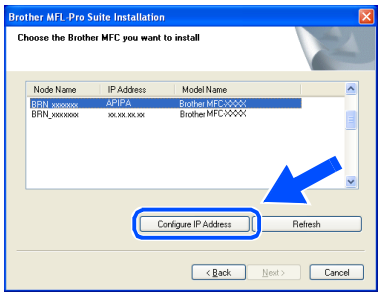

21 Enter the proper IP Address information for your network, and then click **OK**.



(e.g. Enter 192.168.0.105 for IP Address)

22 Click **Next**.

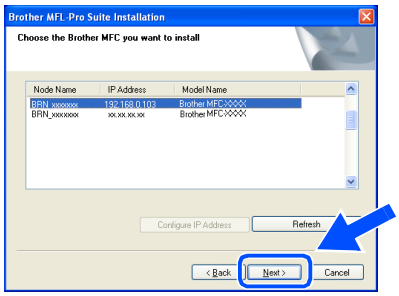

See the For Administrator section of this guide or the NC-9100h User's Guide located on the CD-ROM for more network configuration information.

23 **Windows NT® Users → Go to 27**
Windows® 98/98SE/Me/2000/XP Users:
Select yes and then click **Next**.

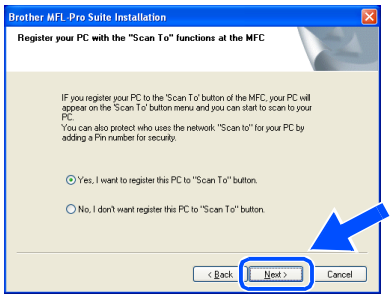
Brother MFL-Pro Suite Installation
Register your PC with the "Scan To" functions at the MFC
IF you register your PC to the 'Scan To' button of the MFC, your PC will appear on the 'Scan To' button menu and you can start to scan to your PC.
You can also protect who uses the network "Scan to" for your PC by adding a Pin number for security.
Yes, I want to register this PC to "Scan To" button.
No, I don't want register this PC to "Scan To" button.
< Back
Next >
Cancel

24 Click **Next** or enter the name you want displayed on the LCD for your PC and then click **Next**.
The default name is the name of your PC.

You can avoid receiving unwanted documents by setting a 4-digit PIN Number.

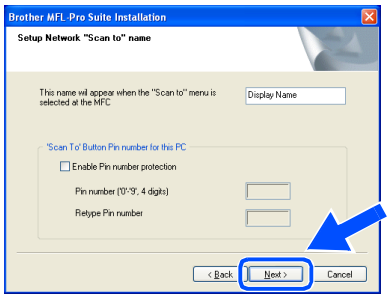
Brother MFL-Pro Suite Installation
Setup Network "Scan to" name
This name will appear when the "Scan to" menu is selected at the MFC
Display Name
'Scan To' Button Pin number for this PC
Enable Pin number protection
Pin number (0-9, 4 digits)
Retype Pin number
< Back
Next >
Cancel

Please wait for the window to open.

25 The README.WRI file will be displayed. Please read this file for troubleshooting information and then close the file to continue installation.

26 Check the **Run On-Line Registration** and then click **Next**.

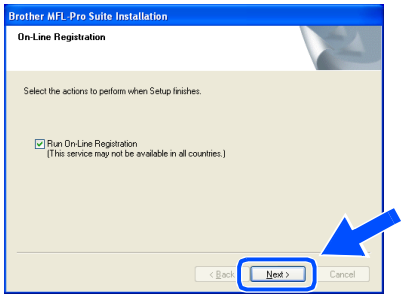
Brother MFL-Pro Suite Installation
On-Line Registration
Select the actions to perform when Setup finishes.
Run On-Line Registration
(This service may not be available in all countries.)
< Back
Next >
Cancel

27 Click **Finish** to restart your computer.

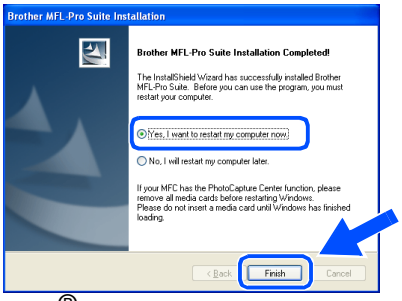
Brother MFL-Pro Suite Installation
Brother MFL-Pro Suite Installation Completed!
The InstallShield Wizard has successfully installed Brother MFL-Pro Suite. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
If your MFC has the PhotoCapture Center function, please remove all media cards before restarting Windows.
Please do not insert a media card until Windows has finished loading.
< Back
Finish
Cancel

Windows® 98/98SE/Me/NT/2000 Users follow step **28**.

The Network Scanning feature is not supported in Windows NT®.

OK! **For Windows® XP Users Only**
The Brother PC-FAX, Printer and Scanner drivers have been installed and the installation is now complete.

28 After the computer restarts, click **Yes** to have the Control Center load each time Windows® is started. The Control Center will appear as an icon in the task tray.
If you click **No** the Scan keys on the MFC will be disabled.

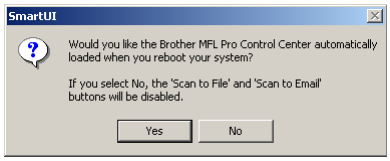
SmartUI
Would you like the Brother MFL Pro Control Center automatically loaded when you reboot your system?
If you select No, the 'Scan to File' and 'Scan to Email' buttons will be disabled.
Yes
No

- *If you checked the box in step 26, the screen for On-Line Registration will appear. Please complete your registration before proceeding to step 28.*
- *Even if you select **No**, you will be able to launch the Brother Control Center later to use the **Scan** key by double clicking the Smart UI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 14 in the Documentation (User's Guide) located on the CD-ROM.*

OK! **For Windows® 98/98SE/Me/2000 Users**
The Brother PC-FAX, Printer and Scanner drivers have been installed and the installation is now complete.

For Windows NT® Users
The Brother PC-FAX and Printer drivers have been installed and the installation is now complete.

For USB Interface Cable Users

For Mac OS® 8.6 to 9.2

Make sure that you have completed the instructions from Step 1 “Setting Up the Machine” on pages 2 - 8.

1. Switch off and unplug the MFC from the AC outlet and disconnect it from your Macintosh if you already connected an interface cable.

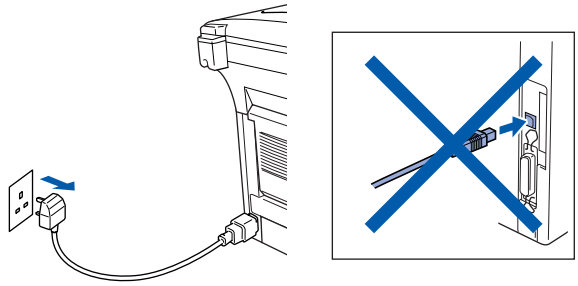

2. Turn on your Macintosh®.
3. Insert the supplied CD-ROM for Macintosh® into your CD-ROM drive.

4. Double-click the **Start Here** icon to install the printer, scanner and PC-FAX Send drivers. If the language screen appears select your language.

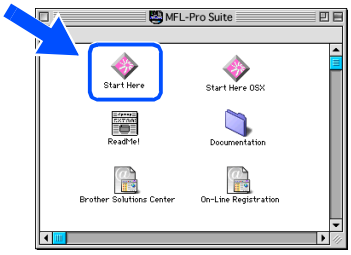

5. Click **Install** next to the MFL-Pro Suite for your country.

6. Select **USB Interface**, and then click **Install**.
7. After the installation is completed, restart your Macintosh®.
8. Connect the USB interface cable to your Macintosh®, and then connect it to the MFC.

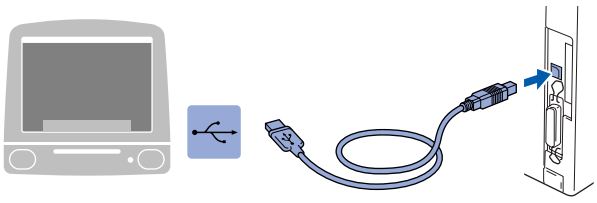

Do not connect the MFC to a USB port on a keyboard or a non powered USB hub.

9. Turn on the MFC by plugging in the power cord. Turn the power switch on.

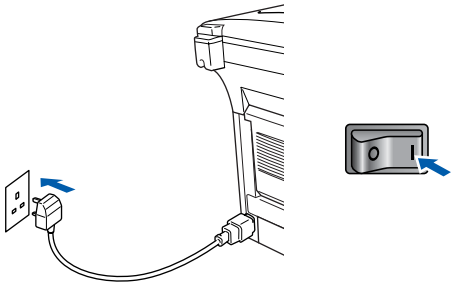

10. From the Apple® menu, open the **Chooser**.

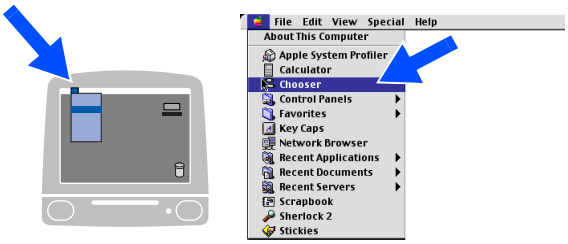

11 Click the **Brother Laser** icon you installed. On the right side of the **Chooser**, select the printer to which you want to print. Close the **Chooser**.

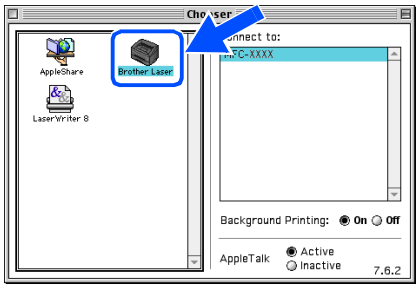

OK! **The Brother PC-FAX Send, Printer and Scanner drivers have been installed.**

12 To install Presto!® PageManager®, click **Install** next to the Presto!® PageManager® and follow on the Screen instructions.

You can easily scan, share and organize photos and documents using Presto!® PageManager®.

OK! **Presto!® PageManager® has been installed and the installation is now complete.**

For USB Interface Cable Users

For Mac OS® X 10.1/10.2.1 or greater

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 2 - 8.

1. Switch off and unplug the MFC from the AC outlet and disconnect it from your Macintosh if you already connected an interface cable.

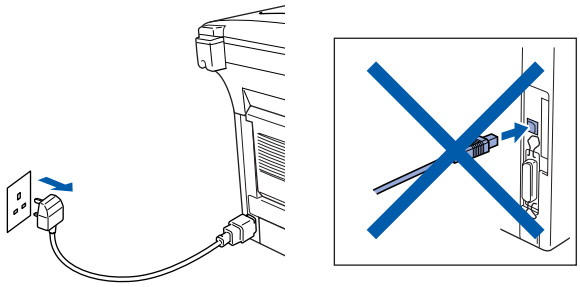

2. Turn on your Macintosh®.

3. Insert the supplied CD-ROM for Macintosh® into your CD-ROM drive.



4. Double-click the **Start Here OSX** icon to install the printer driver, Scanner driver, Brother PC-FAX Send and Remote Setup program. If the language screen appears select your language.
(Scanning is not supported in Mac OS® 10.1).

5. Click **Install** next to the MFL-Pro Suite.

6. Select **USB Interface**, and then click **Install**.

7. Connect the USB interface cable to your Macintosh®, and then connect it to the MFC.

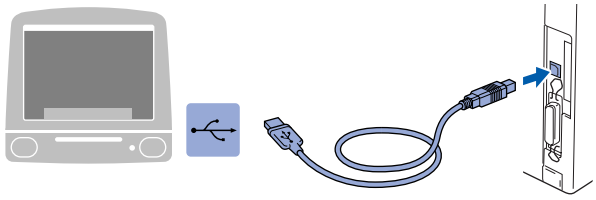

Do not connect the MFC to a USB port on a keyboard or a non powered USB hub.

8. Turn on the MFC by pluging in the power cord. Turn the power switch on.

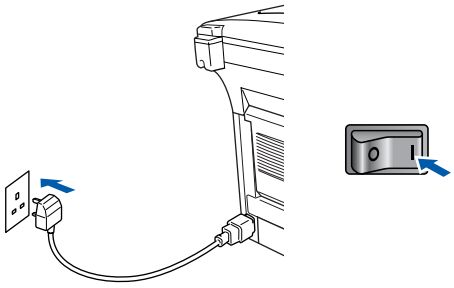

9. Select **Applications** from the **Go** menu.

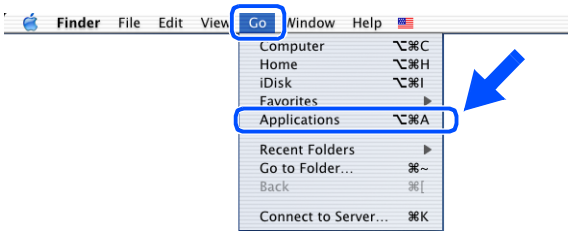

10. Open the **Utilities** folder.

11 Open the **Printer Center** icon.

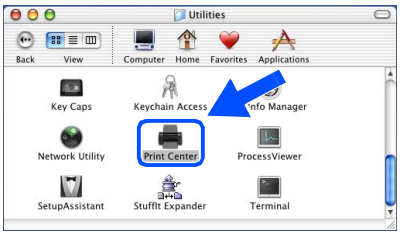

12 Click **Add Printer...**.

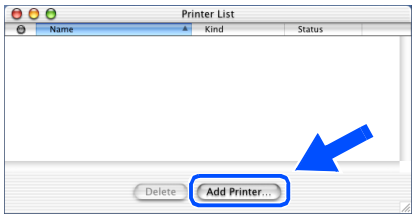

13 Select **USB**.

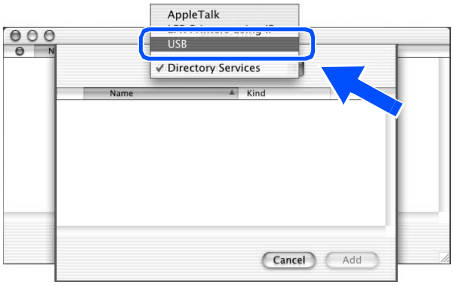

14 Select **MFC-8440/8840D**, and then click **Add**.

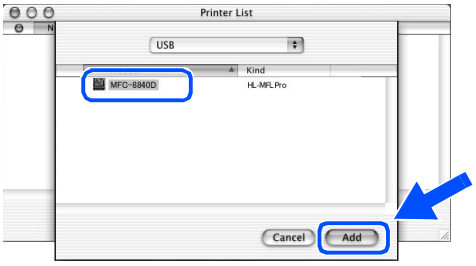

15 Select **Quit Printer Center** from the **Printer Center** menu.

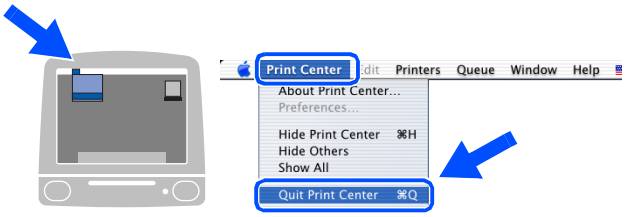

OK! **The Brother Printer driver, Scanner driver, Brother PC-FAX Send and Remote Setup Program have been installed and the installation is now complete.**

Scanning is not supported on Mac OS® 10.1.

16 To install Presto!® PageManager®, click **Install** next to the Presto!® PageManager® and follow on the Screen instructions.

You can easily scan, share and organize photos and documents using Presto!® PageManager®.

OK! **Presto!® PageManager® has been installed and the installation is now complete.**

For Network Interface Cable Users

For Mac OS® 8.6 to 9.2

Make sure that you have completed the instructions from Step 1 “Setting Up the Machine” on pages 2 - 8.

1. Make sure that the NC-9100h (Network Print/Fax Server) is installed into the MFC. *(See Optional accessories in Chapter 23 of the User’s Guide.)*
2. Switch off and unplug the MFC from the AC outlet and disconnect it from your Macintosh if you already connected an interface cable.

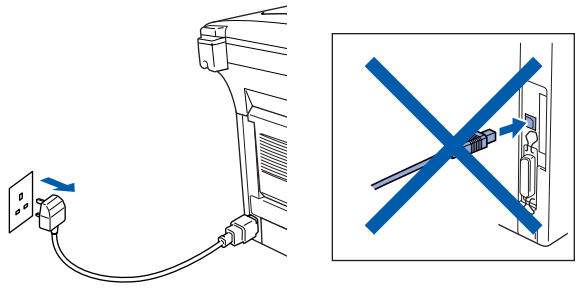

3. Turn on your Macintosh®.
4. Insert the supplied CD-ROM for Macintosh® into your CD-ROM drive.

5. Double-click the **Start Here** icon to install the printer, scanner and PC-FAX Send drivers. If the language screen appears select your language.

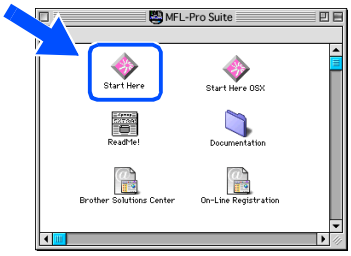

6. Click **Install** next to the MFL-Pro Suite for your country.

7. Select **Network Interface**, and then click **Install**.
8. After the installation is completed, restart your Macintosh®.
9. Connect the network interface cable to the printer, and then connect it to a free port on your hub.

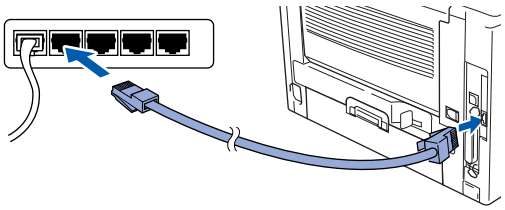

10. Turn on the MFC by plugging in the power cord. Turn the power switch on.

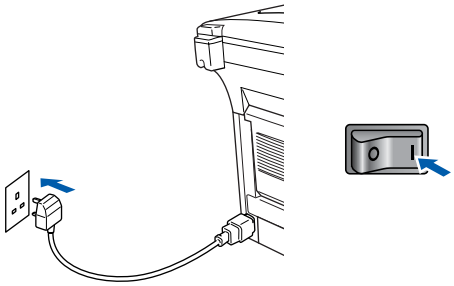

11 Open the **Chooser** from the **Apple** menu.

12 Click the **Brother Laser (AT)** icon, and then select **BRN_xxxxxx_P1**. [1]
Click **Setup**.

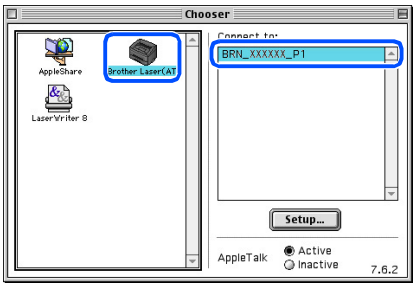

1 *xxxxxx are the last six digits of the Ethernet address.*

13 Click **OK**, and then close the **Chooser**.

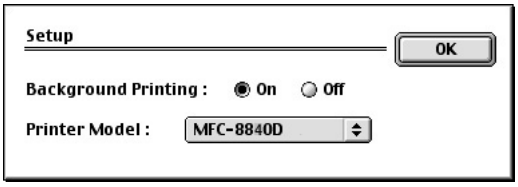

Network User's Guide Chapter 7 on the CD-ROM.

OK! **The setup is now complete.**

For Network Interface Cable Users

For Mac OS® X 10.1/10.2.1 or greater

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 2 - 8.

1. Make sure that the NC-9100h (Network Print/Fax Server) is installed into the MFC. *(See Optional accessories in Chapter 23 of the User's Guide.)*

2. Switch off and unplug the MFC from the AC outlet and disconnect it from your Macintosh if you already connected an interface cable.

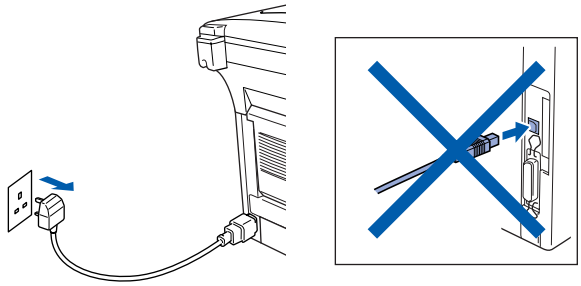

3. Turn on your Macintosh®.

4. Insert the supplied CD-ROM for Macintosh® into your CD-ROM drive.

5. Double-click the **Start Here OSX** folder to install the printer driver and Remote Setup program. If the language screen appears select your language.

6. Click **Install** next to the MFL-Pro Suite.

7. Select **Network Interface**, and then click **Install**.

8. Connect the network interface cable to the printer, and then connect it to a free port on your hub.

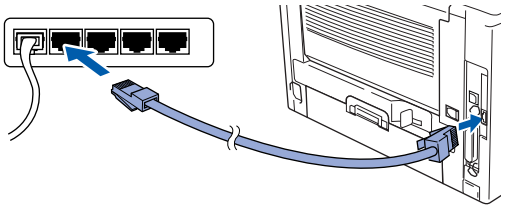

9. Turn on the MFC by plugging in the power cord. Turn the power switch on.

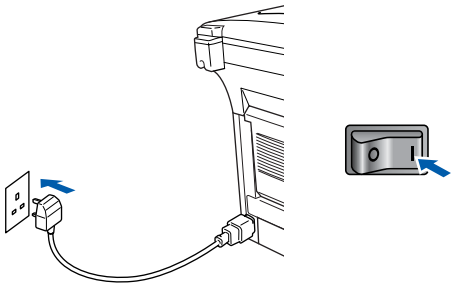

10. Select **Applications** from the **Go** menu.

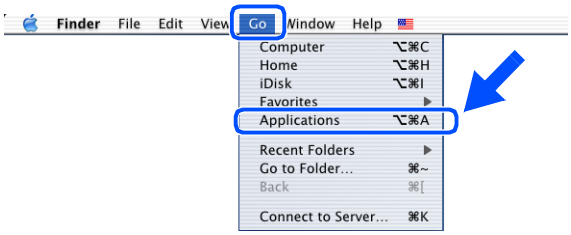

⑪ Open the **Utilities** folder.

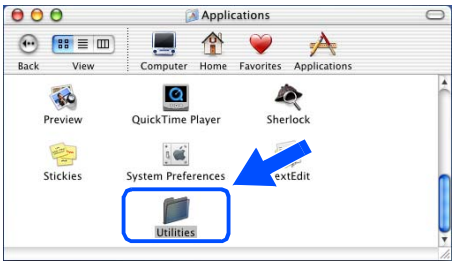

⑫ Open the **Print Center** icon.

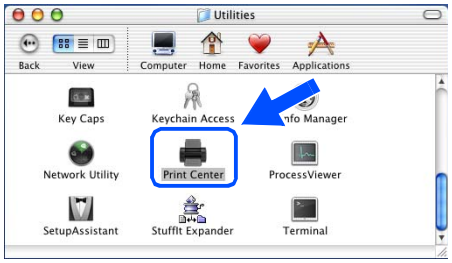

⑬ Click the **Add Printer...** button.

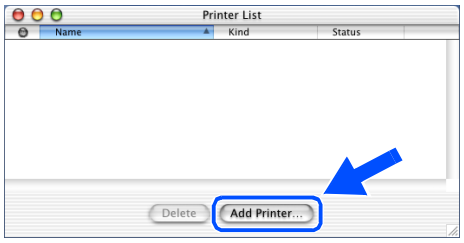

⑭ Select **AppleTalk**.

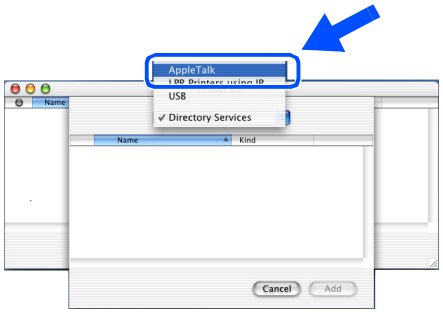

⑮ Select **BRN_xxxxxx_P1** [1], and then click the **Add** button.

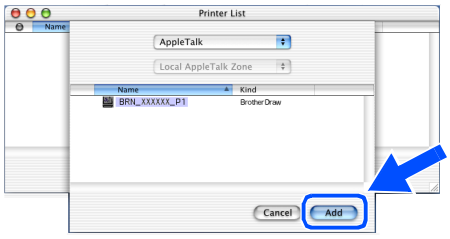

1 *xxxxxx are the last six digits of the Ethernet address.*

Network User's Guide Chapter 7 on the CD-ROM.

⑯ Select **Quit Printer Center** from the **Printer Center** menu.

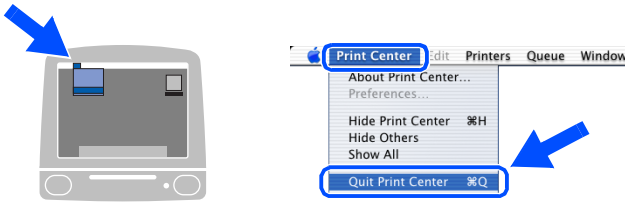

OK! **The setup is now complete.**

For user's of Mac OS® 10.2.2
Please see Network User's Guide Chapter 7 on the CD-ROM for information about using Rendezvous.

For Administrators

This section is for using the printer on a network. An administrator should set up the printer using the following steps.

Network User's Guide Chapter Map (NC-9100h)

Windows®

Macintosh®

Windows® 98/Me	Peer-to-Peer	TCP/IP	Chapter 3	Peer-to-Peer Printing
		NetBIOS	Chapter 4	NetBIOS Peer-to-Peer Printing
	Brother Internet Print	TCP/IP	Chapter 5	Configuring Internet Print for Windows®
	Netware	IPX/SPX	Chapter 6	Novell Netware Printing
Windows NT®	Peer-to-Peer	TCP/IP	Chapter 2	TCP/IP Printing
		NetBIOS	Chapter 4	NetBIOS Peer-to-Peer Printing
		DLC/LLC	Chapter 8	DLC Printing
	Brother Internet Print (NT® 4.0 only)	TCP/IP	Chapter 5	Configuring Internet Print for Windows®
	Netware	IPX/SPX	Chapter 6	Novell Netware Printing
Windows® 2000/XP	Peer-to-Peer (Windows® 2000 only)	TCP/IP	Chapter 2	TCP/IP Printing
		NetBIOS	Chapter 4	NetBIOS Peer-to-Peer Printing
		DLC/LLC	Chapter 8	DLC Printing
	IPP (Internet Printing Protocol)	TCP/IP	Chapter 2	TCP/IP Printing
	Brother Internet Print	TCP/IP	Chapter 5	Configuring Internet Print for Windows®
	Netware	IPX/SPX	Chapter 6	Novell Netware Printing
UNIX/Linux		TCP/IP	Chapter 1	UNIX Printing
Macintosh®		AppleTalk	Chapter 7	Apple talk (Ether Talk TCP/IP Printing)
		TCP/IP	Chapter 7	Apple talk (Ether Talk TCP/IP Printing)
		Rendezvous	Chapter 7	Rendezvous Printing
OS2 Warp Server LAN Server		TCP/IP	Chapter 2	TCP/IP Printing
		NetBIOS	Chapter 4	NetBIOS Peer-to-Peer Printing

Installing the BRAdmin Professional Configuration Utility (Windows® Users Only)

The BRAdmin Professional software utility is designed to manage your Brother network connected devices such as network-ready printers and/or network-ready Multifunction devices in a Local Area Network (LAN) environment.
BRAdmin Professional can also be used to manage devices from other manufacturers whose products support SNMP (Simple Network Management Protocol).
For more information on BRAdmin Professional go to http://solutions.brother.com

1. Insert the supplied CD-ROM for Windows® into your CD-ROM drive. The opening screen will appear automatically.
   Follow the on-screen instructions.



2. Click the **Install Software** icon on the menu screen.

3. Click Network Applications for Optional NC-9100h.

4. Click **BRAdmin Professional** and follow the on-screen instructions.

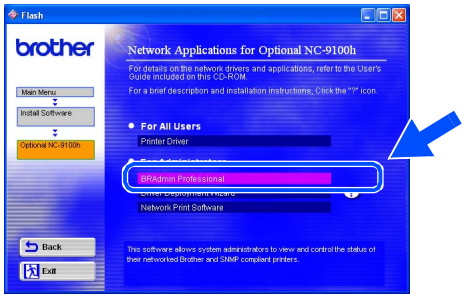

Web BRAdmin (Windows® Users Only)

Brother has also developed Web BRAdmin, an enterprise network software utility that enables management of Brother and other SNMP compliant devices in larger LAN/WAN environments.

This software is Web server based and requires the installation of Microsoft's Internet Information Server and Sun's Java client software. To learn more about the Web BRAdmin software or to download it, please go to http://solutions.brother.com/webbradmin

Setting your IP Address, Subnet Mask and Gateway using BRAdmin Professional (Windows® Users Only)

1. Start BRAdmin Professional, and select **TCP/IP**.

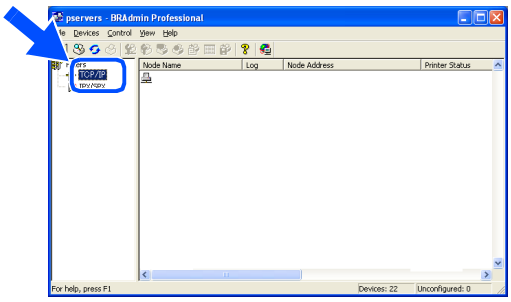

2. Select **Search Active Devices** from the **Devices** menu.
BRAdmin will search for new devices automatically.

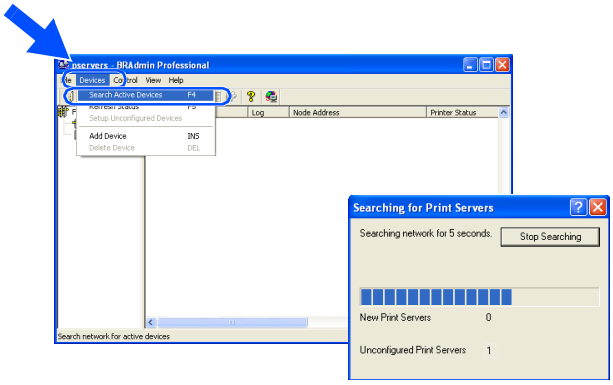

3. Double-click the new device.

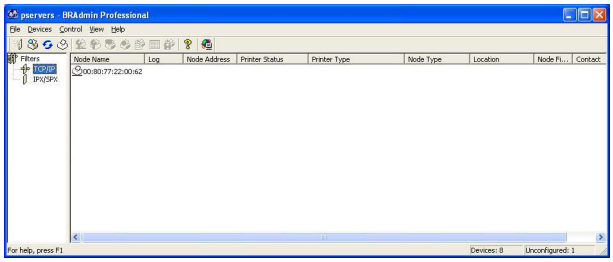

4. Enter the **IP Address**, **Subnet Mask** and **Gateway**, and then click the **OK** button.



5. The address information will be saved to the printer.

Options

The MFC has the following optional accessories. You can expand the capabilities of the MFC by adding these items.

Lower Tray Unit	DIMM Memory
LT-5000	
	
Second lower paper tray expands total input capacity by another 250 sheets to a total input capacity of 500 sheets.	For more details, see “Memory Board” in Chapter 21 (User’s Guide).
Network Print/Fax Server	**External Wireless Print/Scan Server**
NC-9100h	**NC-2200w**
	
The optional Network Print/Fax Server (NC-9100h) transforms your MFC into a Network Multi Function Center, offering Network Printing / Network PC-FAX and Network Scanning capability.	The optional External Wireless Print/Scan Server (NC-2200w) provides the wireless network printing service and the network scanner service capability.

Replacement Consumables

Drum Unit	Toner
DR-3000	**TN-3030 / TN-3060**
	
Up to 20,000 A4/Letter pages @ 5% coverage.	TN-3030: Up to 3,300 A4/Letter pages @ 5% coverage. TN-3060: Up to 6,500 A4/Letter pages @ 5% coverage.

Trademarks

The Brother logo is a registered trademark of Brother Industries, Ltd.
Brother is a registered trademark of Brother Industries, Ltd.
Multi-Function Link is a registered trademark of Brother International Corporation.
© Copyright 2003 Brother Industries, Ltd. All rights reserved.
Windows, Microsoft and Windows NT are registered trademarks of Microsoft in the U.S. and other countries.
Macintosh, QuickDraw, iMac and iBook are trademarks or registered trademarks of Apple Computer, Inc.
Postscript and Postscript Level 3 are registered trademarks or trademarks of Adobe Systems Incorporated.
PaperPort and TextBridge are registered trademarks of ScanSoft, Inc.
Presto! PageManager is a registered trademark of NewSoft Technology Corporation.
Each company whose software title is mentioned in this manual has a Software License Agreement specific to its proprietary programs.
All other brand and product names mentioned in this manual are registered trademarks of their respective companies.

Compilation and Publication

Under the supervision of Brother Industries Ltd., this manual has been compiled and published, covering the latest product descriptions and specifications.
The contents of this manual and the specifications of this product are subject to change without notice.
Brother reserves the right to make changes without notice in the specifications and materials contained herein and shall not be responsible for any damages (including consequential) caused by reliance on the materials presented, including but not limited to typographical and other errors relating to the publication.
This product is designed for use in a Professional Environment.

©2003 Brother Industries, Ltd.

At your side.
brother